

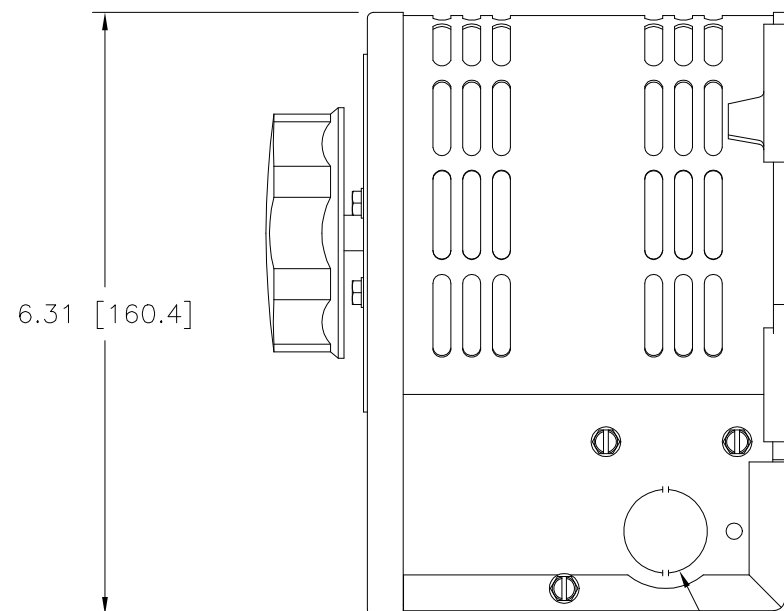
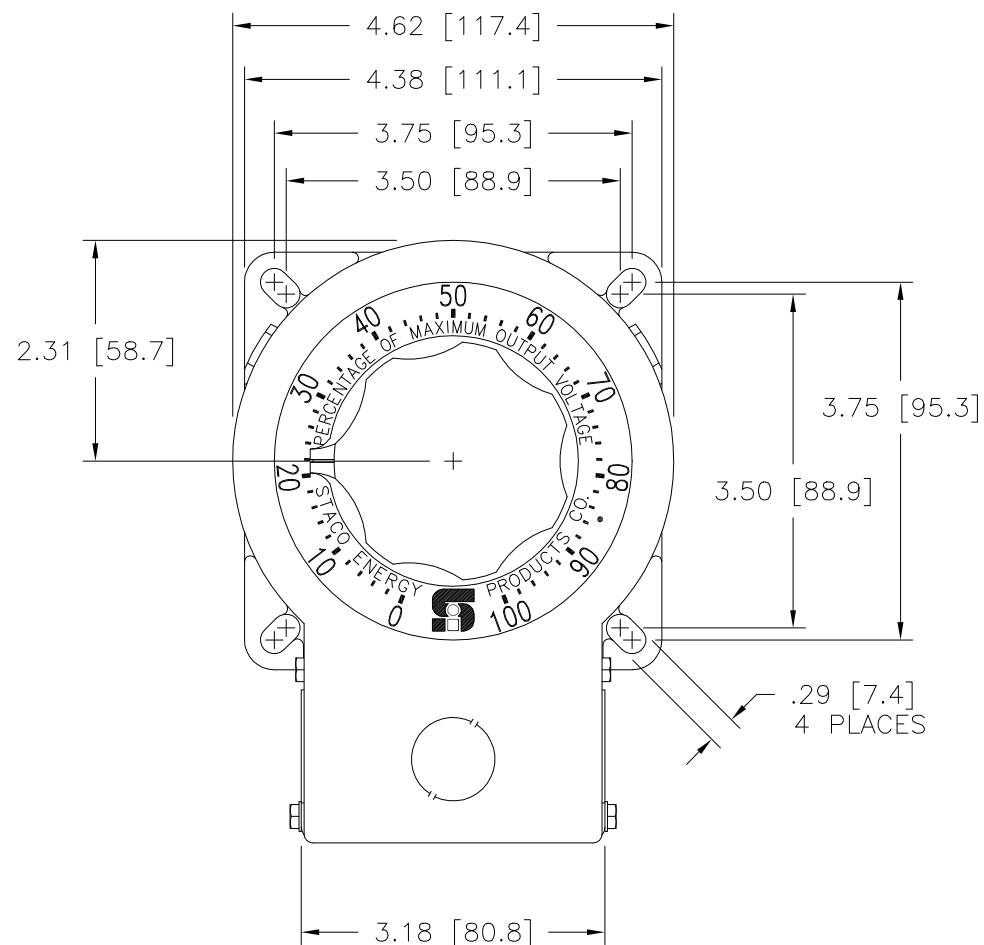


Go to VARIAC.com
to purchase and for
technical support.
Made in the USA

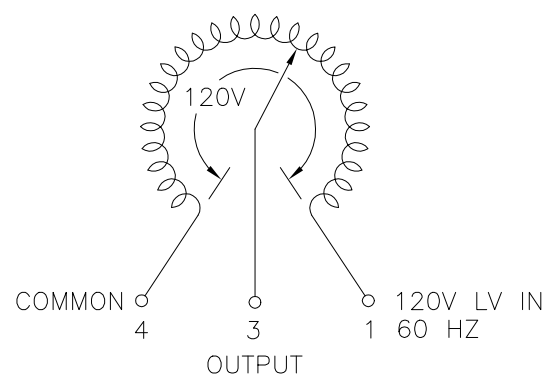

.88 [22.2] DIA. KNOCKOUT
(3) PLACES FOR
WIRING CONNECTIONS

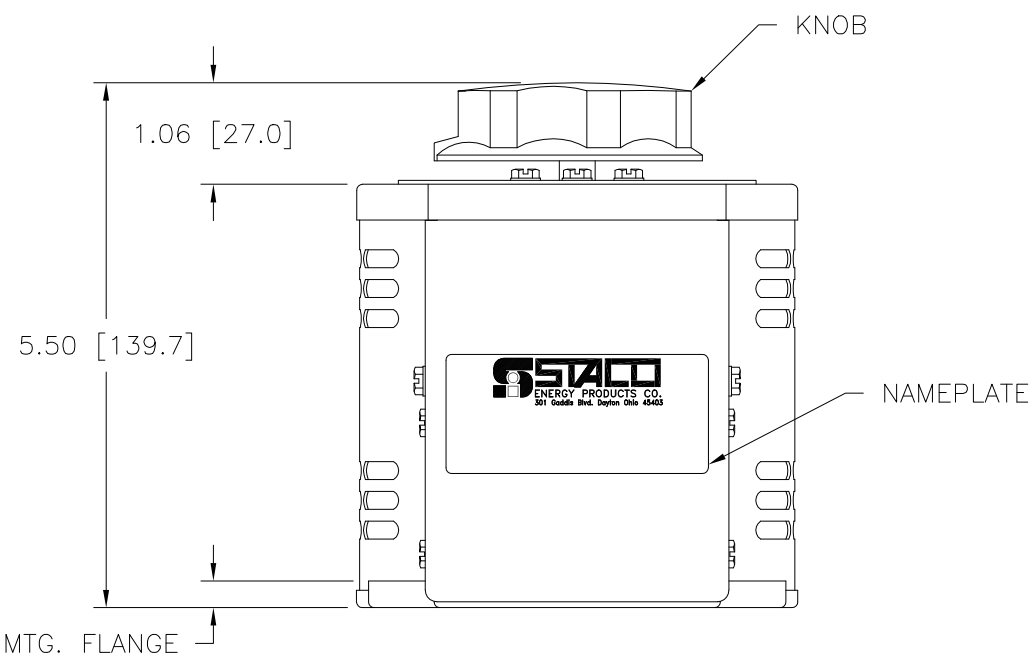

SCHMATIC
VIEW FROM BASE END
FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS											
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS			
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END			
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT
SINGLE PHASE	120	60	0-120	12	1.44	15	1.80	CW	1-4	4-3	
								CCW	1-4	1-3	
<small>UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS .XX .0005 .06 .002 .005 ANGLES 1° DRAFT 1-1/2° UNITS IN [mm]</small>											
<small>MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING</small>											
<small>THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF STACO ENERGY PRODUCTS CO., WHICH RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS THEREIN, AND TO ANY ARTICLE DISCLOSED THEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS.</small>											
TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 1210BCT		DRAWN BY: S.A. SMITH	DATE: 9/24/97	FIRST USED ON:	DO NOT SCALE DWG.	CUSTOMER APPROVAL:	DATE:				
CHECKER:	DATE:	ENGINEER:	DATE:	SCALE: 1=1	WEIGHT APPROX. 10.5 LBS	CODE IDENT. NO. 83008	DWG. NO. 031-3006	SHEET 1 OF 1			