



Go to VARIAC.com to purchase and for technical support. Made in the USA

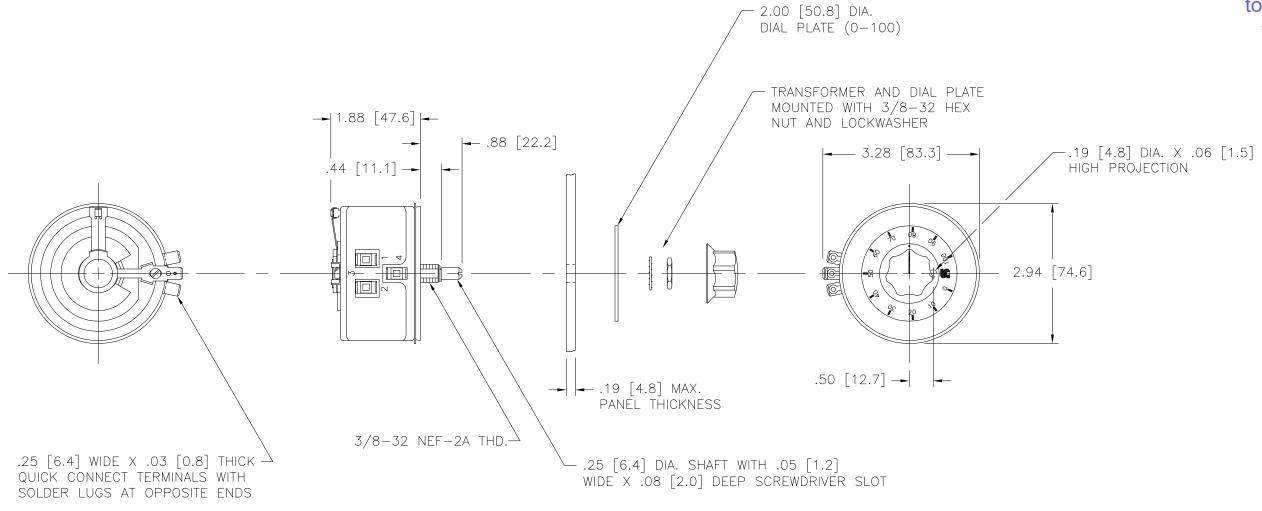

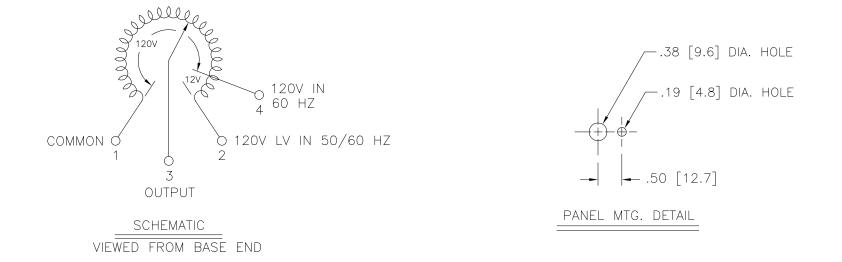

					SPECI	FICATIO	VS						
	INPUT		OUTPUT					SHAFT		TERMINAL CONNECTIONS			
WIRING	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		ROTA	TION O	VOLTAGE AS VIEWED			
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	VOLTAGE		INP			OUTPUT
SINGLE PHASE	120	50/60	0-120	1.75	0.21	2.2	0.26	CW		1 –	-2		1-3
								CC	CW	1 –	-2		2-3
		60	0-132	1.75	0.23	I I		CW		1 –	-4		1-3
UNLESS OTHERWISE SPECIFIED. TOLERANCE IS ±  DECIMALS HOLES ANGLES DRAFT  .XX 100101 .06 .002 1° 1-1/2° IN [mm]  .XXX .005				SPEC. CONTROL				D 1 ()	AWIN	, $\smile$	_	STA	CO
MATERIAL :	TVARIABLE TRANS  MODEL 17					KMEI				GY s co.			
The information and design disclosed herein was originated by and is the property of STACO EMERGY PRODUCTS CO. which reserves all patent, proprietory, design, manufacturing, reproduction, use and sole rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others.						DATE 1/30/02	FIRST USE	ED ON DO N SCALE					
				CHECKER SAS		1/30/02 WEIGHT		PPROX. CAGE (			DWG. SIZE	DWG. NO.	
The foregoing			DATE 1/30/02	SCALE	1/1	SHEET 1 OF 1		D	031-	0101			