

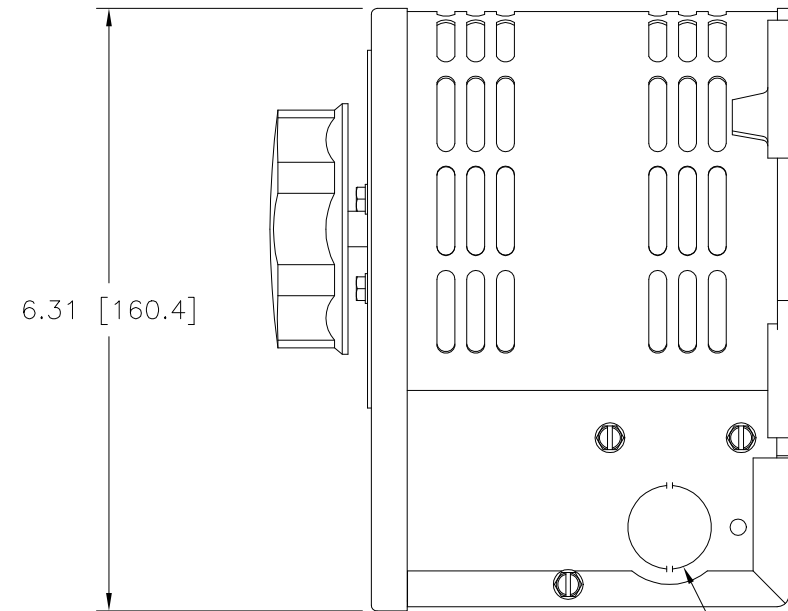
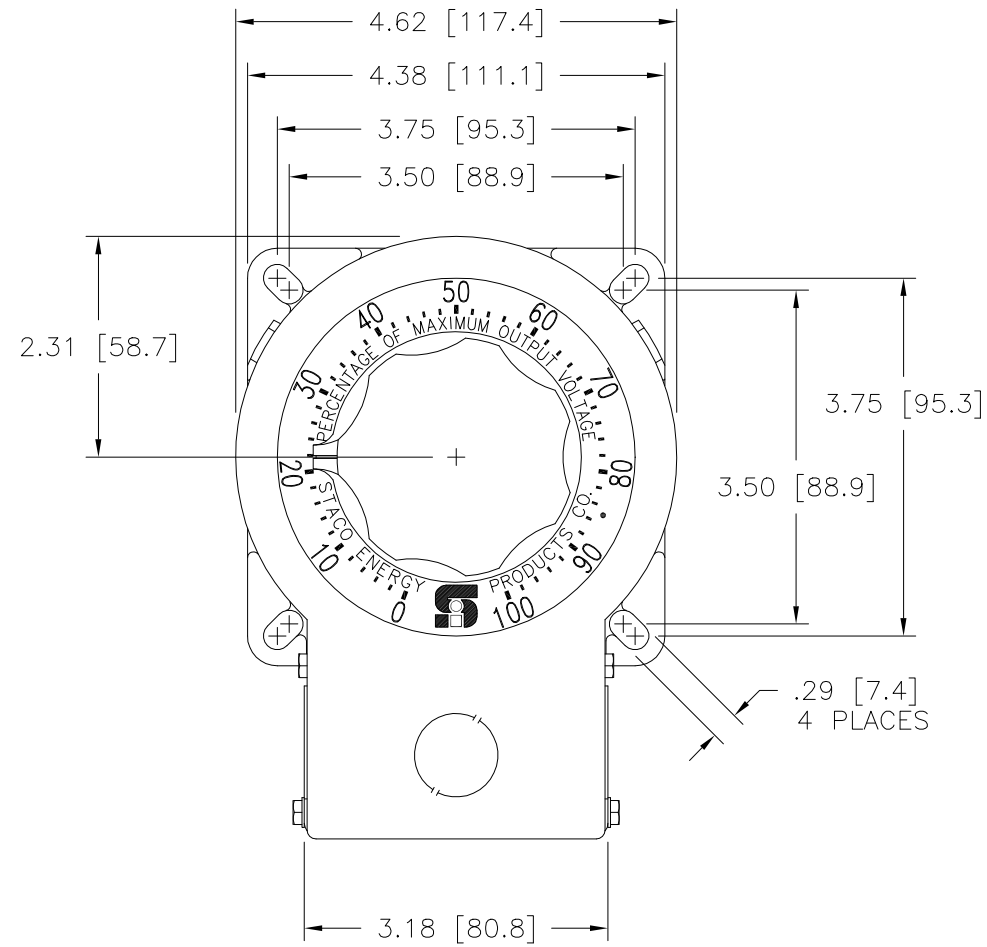


Go to VARIAC.com
to purchase and for
technical support.
Made in the USA

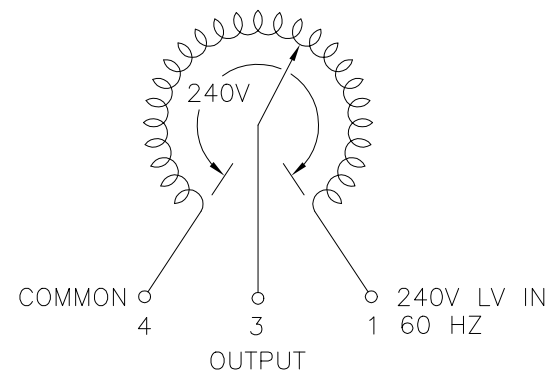

.88 [22.2] DIA. KNOCKOUT
(3) PLACES FOR
WIRING CONNECTIONS

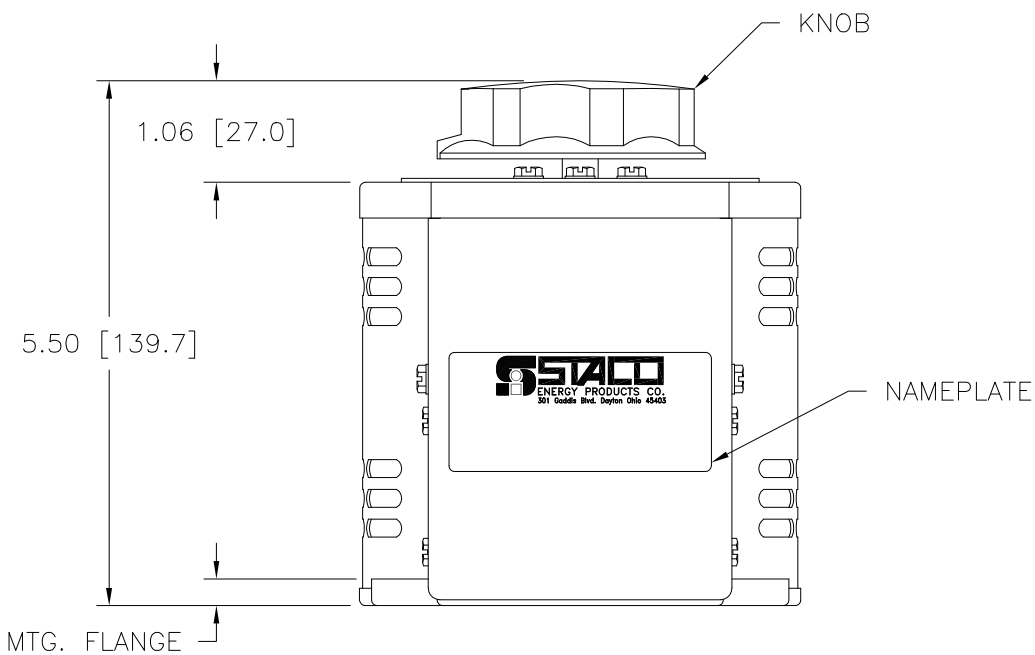

SCHMATIC
VIEW FROM BASE END
FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS											
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS			
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD	CONSTANT IMPEDANCE LOAD	FOR INCREASING VOLTAGE AS VIEWED FROM BASE END					
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA		INPUT	JUMPER	OUTPUT
SINGLE PHASE	240	60	0-240	5.0	1.20	7.0	1.68	CW	1-4	---	4-3
								CCW	1-4	---	1-3

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #				UNITS		TITLE: SPEC. CONTROL DRAWING					
DECIMALS	Holes	ANGLES	DRAFT	IN [mm]		VARIABLE TRANSFORMER					
.XX	.0005	.002	1°	ALL DIMENSIONS APPLY AFTER PLATING		TYPE: 1220BCT					
MATERIAL:				DRAWN BY		DATE		FIRST USED ON		DO NOT SCALE DWG.	
				S.A. SMITH		9/26/97				CUSTOMER APPROVAL	
				CHECKER		DATE		WEIGHT APPROX.		CODE IDENT. NO.	
								10.25 LBS		83008	
				ENGINEER		DATE		SCALE		DWG. NO.	
								1=1		D 031-3306	
								SHEET 1 OF 1			

