
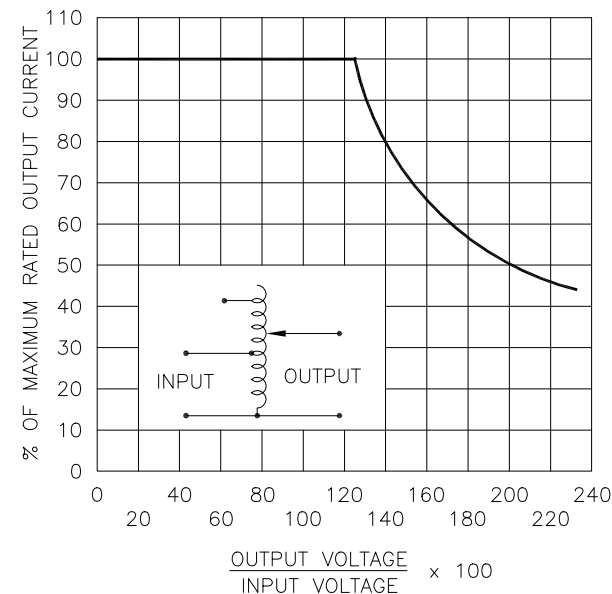
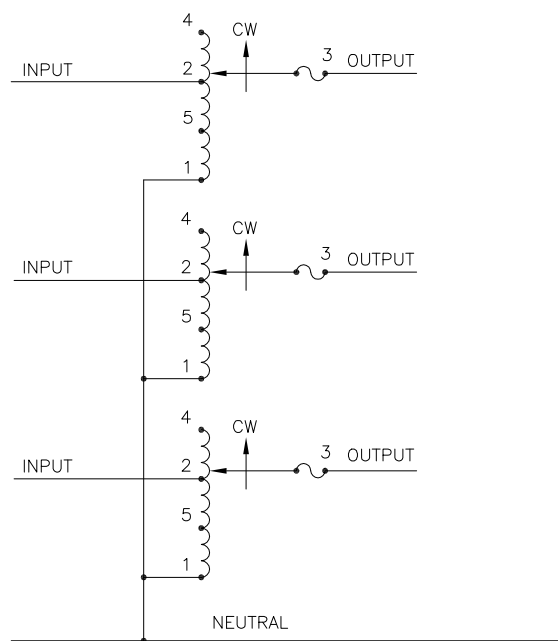


Go to [VARIAC.com](http://VARIAC.com)  
 to purchase and for  
 technical support.  
 Made in the USA

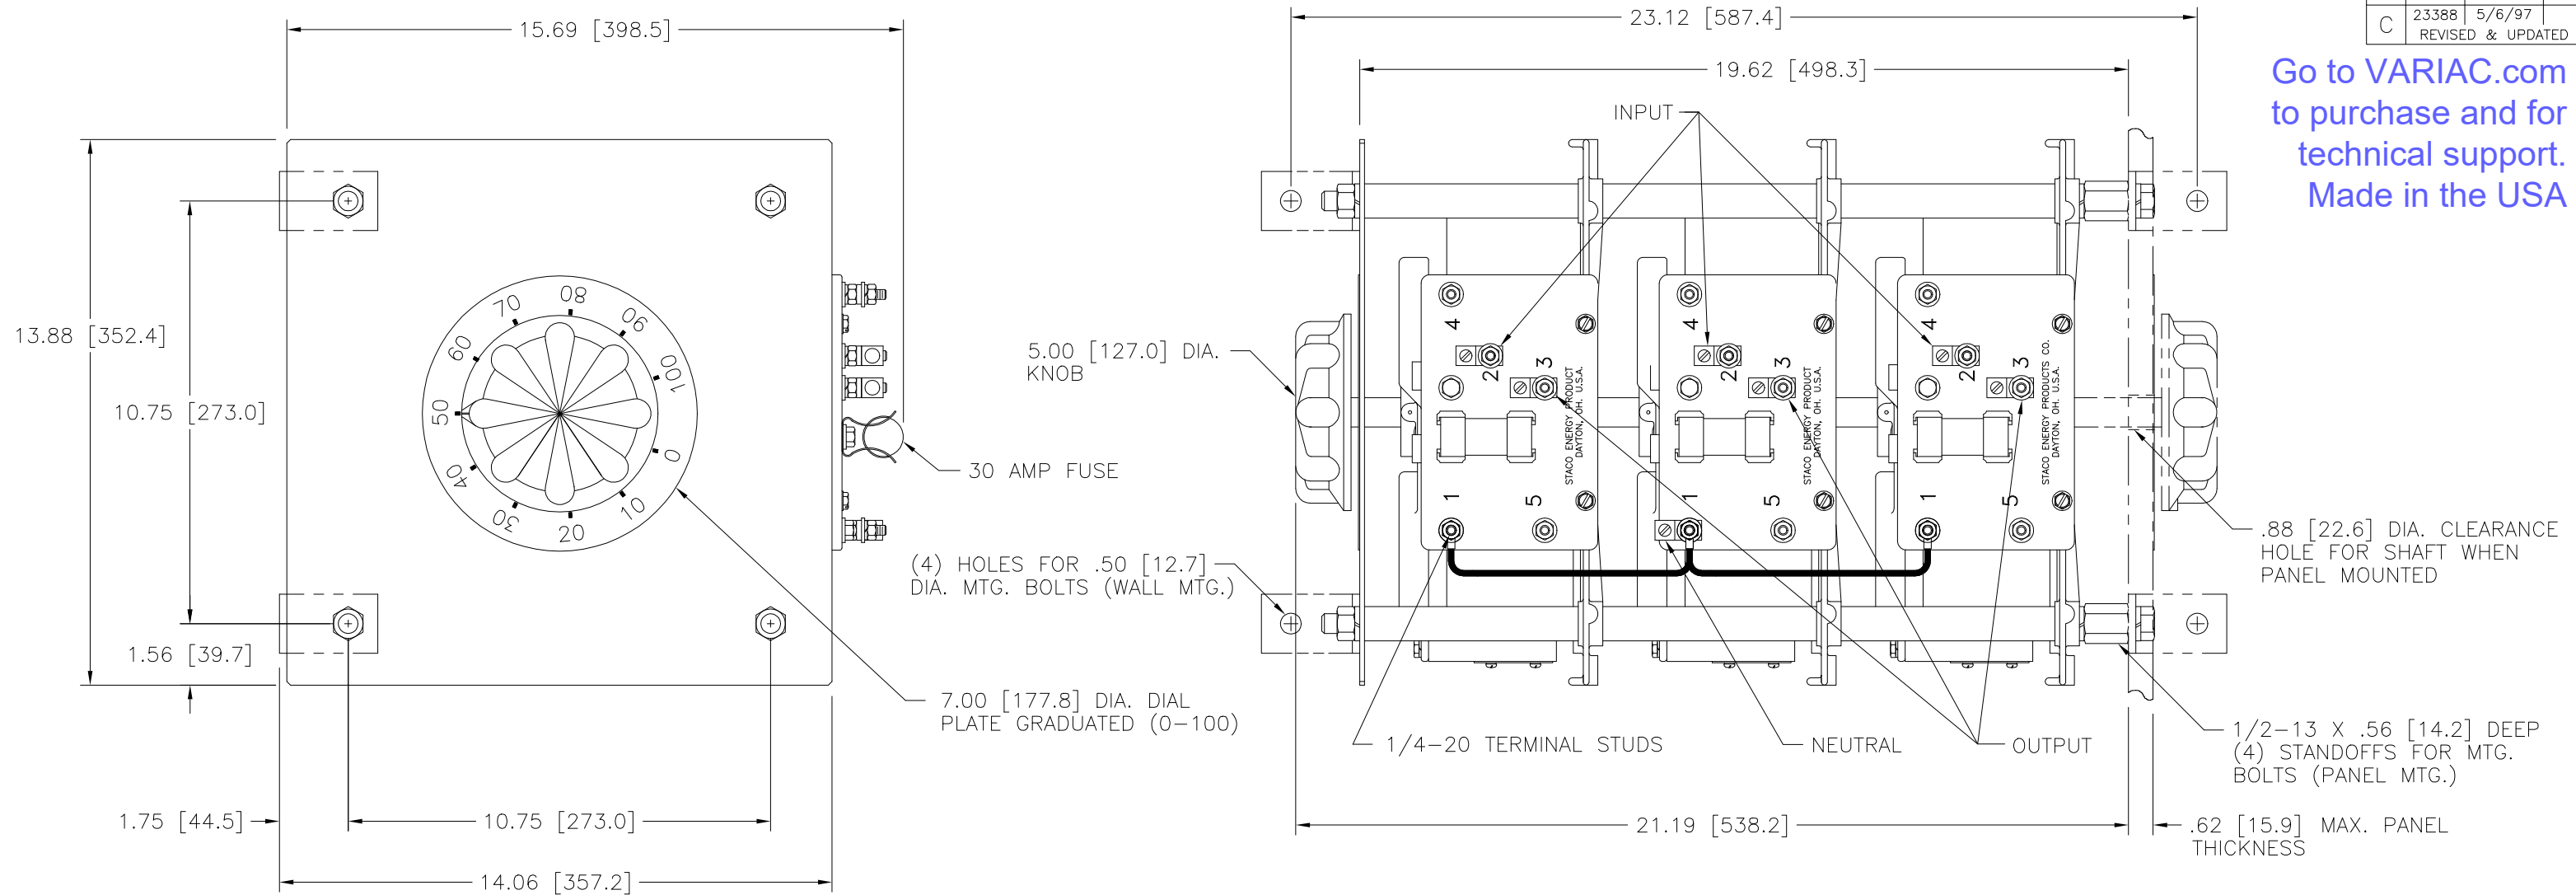

\* MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25 PERCENT ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE (SEE FIGURE A).

++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, (SEE FIGURE A).

V.D. = VOLTAGE DOUBLER.

SPECIFICATIONS									
WIRING	INPUT		OUTPUT			SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	MAX. AMPS	MAX. KVA		FOR INCREASING VOLTAGE AS VIEWED FROM ROTOR END		
							INPUT	JUMPER	OUTPUT
THREE PHASE WYE	480	50/60	0-480	28	23.3	CW	4-4-4	—	3-3-3
		60	0-560	28	27.2	CW	2-2-2	—	3-3-3
	240	60	0-560	28 <sup>*</sup> 12 V.D.	11.8 <sup>++</sup>	CW	5-5-5	—	3-3-3

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS .005  
 HOLES .002  
 ANGLES 1°  
 DRAFT 1-1/2°  
 UNITS IN [mm]  
 MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING

TITLE: SPEC. CONTROL DRAWING  
 VARIABLE CONTROL DRAWING  
 TYPE: 5021-3Y

STACO ENERGY PRODUCTS CO.  
 A COMPONENTS CORPORATION OF AMERICA COMPANY  
 DAYTON, OHIO U.S.A.

DRAWN BY: TIM RAU  
 DATE: 5/6/97  
 FIRST USED ON: DO NOT SCALE DWG.  
 CHECKER: DATE: WEIGHT APPROX. 240 LBS.  
 ENGINEER: DATE: SCALE: .5=1 SHEET 1 OF 1

CUSTOMER APPROVAL: DATE: Dwg. No. 031-8149