


(4) STANDOFFS TAPPED  
 1/4-28 X .38 [9.5]  
 DEEP FOR MTG. BOLTS

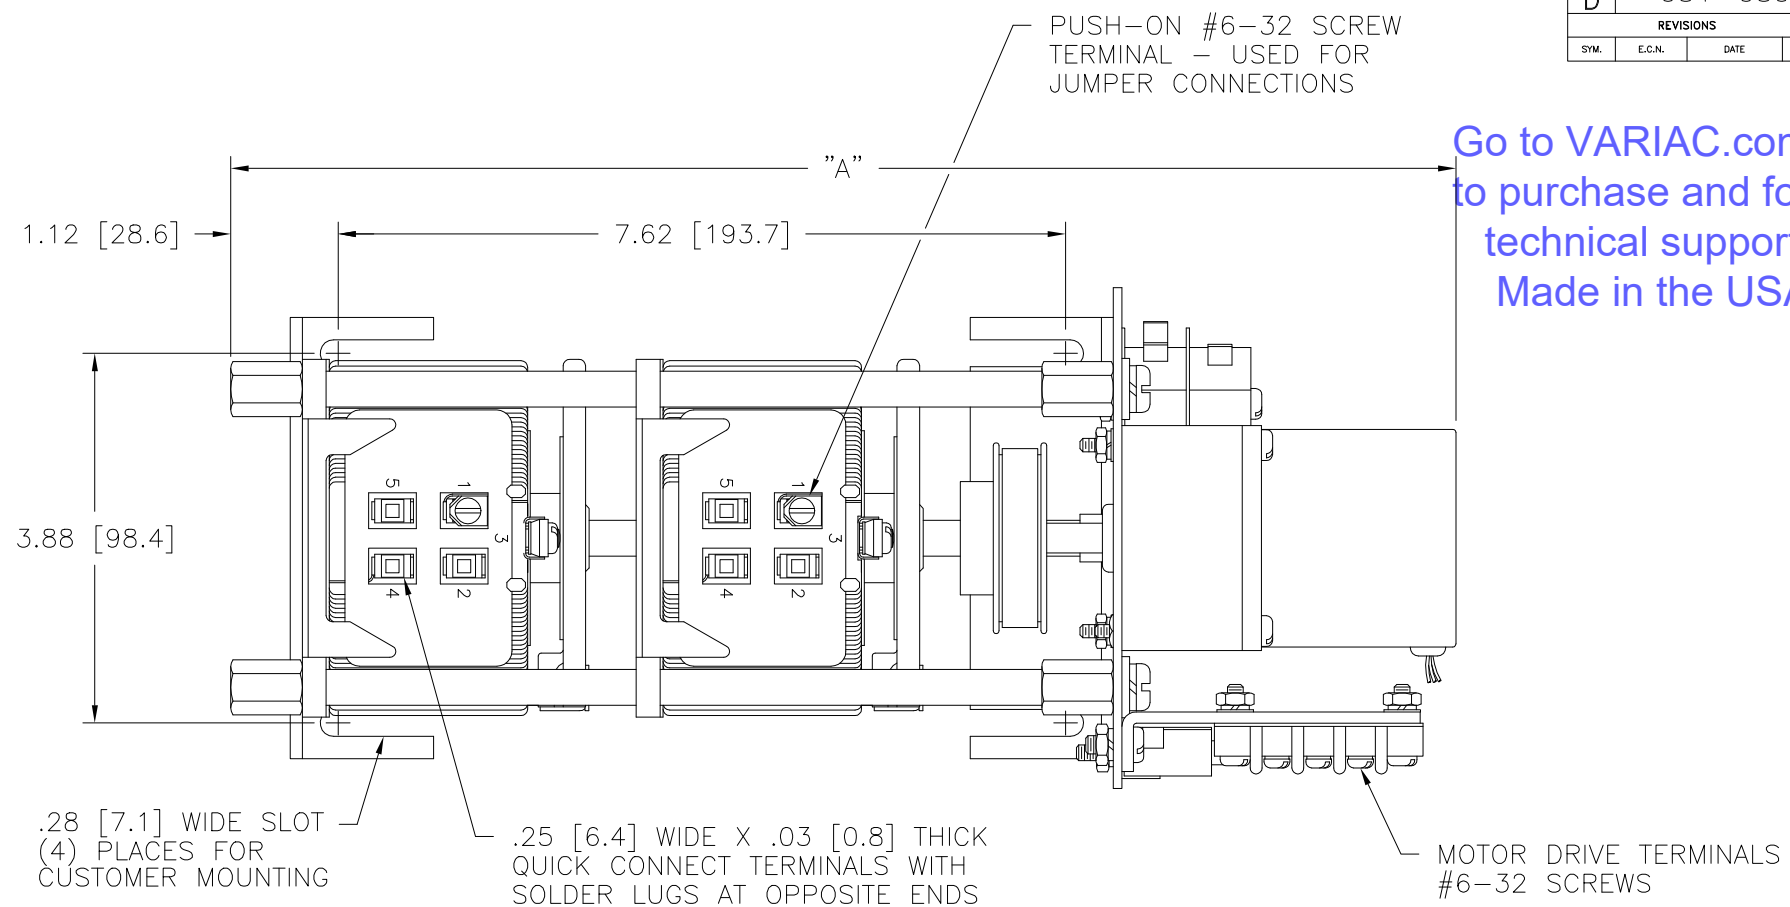


.28 [7.1] WIDE SLOT  
 (4) PLACES FOR  
 CUSTOMER MOUNTING


.25 [6.4] WIDE X .03 [0.8] THICK  
 QUICK CONNECT TERMINALS WITH  
 SOLDER LUGS AT OPPOSITE ENDS

MOTOR DRIVE TERMINALS  
 #6-32 SCREWS

Go to [VARIAC.com](http://VARIAC.com)  
 to purchase and for  
 technical support.  
 Made in the USA

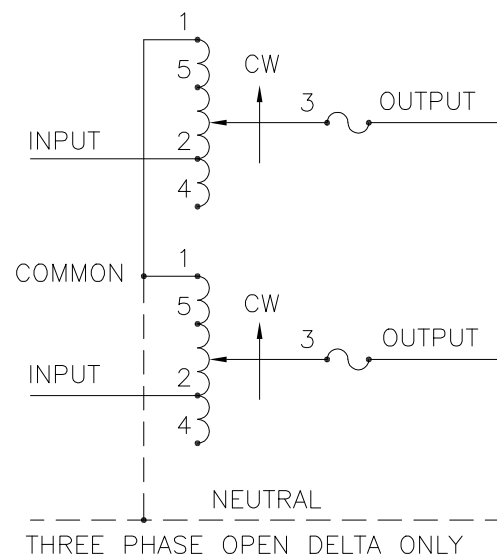

SCHMATIC  
 THREE PHASE OPEN DELTA AND SINGLE  
 PHASE SERIES. FUSE RECOMMENDED BUT  
 NOT SUPPLIED.

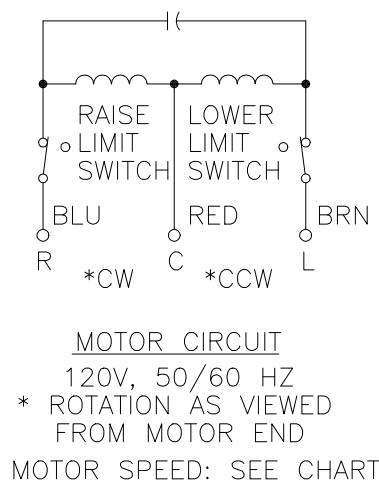

NOTE:  
 UNIT IS SUPPLIED WITH OPTIONAL PUSH-ON  
 #6-32 SCREW TERMINALS FOR TRANSFORMER  
 CONNECTIONS.

- ∇ IF GANGED UNITS ARE USED IN A SYSTEM THAT ORDINARILY HAS A COMMON NEUTRAL OR GROUND BETWEEN SOURCE AND LOAD, THE NEUTRAL OR GROUND MUST BE CONNECTED TO THE COMMON TERMINALS OF THE VARIABLE TRANSFORMER ASSEMBLY. IF THE SYSTEM HAS NO NEUTRAL, THE LOAD MUST BE BALANCED OR THE TRANSFORMER WILL BE DAMAGED.
- ++ LINE TO LINE VOLTAGE.
- JUMPER PROVIDED IN STANDARD COMMON POSITION AND SHOULD BE MOVED OR REMOVED AS REQUIRED.
- + MOTOR DRIVEN UNITS USE TERMINAL CONNECTIONS FOR CCW INCREASING VOLTAGE, AS VIEWED FROM BASE END.

SPECIFICATIONS											
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS			
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END +			
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER ■	OUTPUT
SINGLE PHASE SERIES	240	50/60	0-240	5.0	1.2	7.0	1.68	CW	1-1	4-4	3-3
			0-280	5.0	1.4	—	—	CCW	4-4	1-1	3-3
	120	50/60	0-120	5.0	1.04	7.0	1.46	CW	1-4-1	4-4	3-4-3
			0-140	5.0	1.21	—	—	CCW	4-1-4	1-1	3-1-3
THREE PHASE OPEN DELTA ∇	++	50/60	0-120	5.0	1.04	7.0	1.46	CW	5-4-5	4-4	3-4-3
			0-140	5.0	1.21	—	—	CCW	2-1-2	1-1	3-1-3

SPEED (SECONDS)	MODEL NUMBER	DIM "A"
5	5M501C-2	12.84 [326.1]
15	15M501C-2	12.84 [326.1]
30	30M501C-2	13.23 [336.0]
60	60M501C-2	13.23 [336.0]

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS HOLES .002 ANGLES 1° DRAFT 1-1/2° UNITS IN [mm]

MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING

TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER MODEL: M501C-2

STACO ENERGY PRODUCTS CO. A COMPONENTS CORPORATION OF AMERICA COMPANY DAYTON, OHIO U.S.A.

DRAWN BY: TIM RAU DATE: 3/16/99 FIRST USED ON: DO NOT SCALE DWG. CUSTOMER APPROVAL: DATE:

CHECKER: DATE: WEIGHT APPROX. 19 LBS CODE IDENT. NO. 83008 DWG. NO. 031-0594

ENGINEER: DATE: SCALE 1=1 SHEET 1 OF 1 DWG. NO. 031-0594