
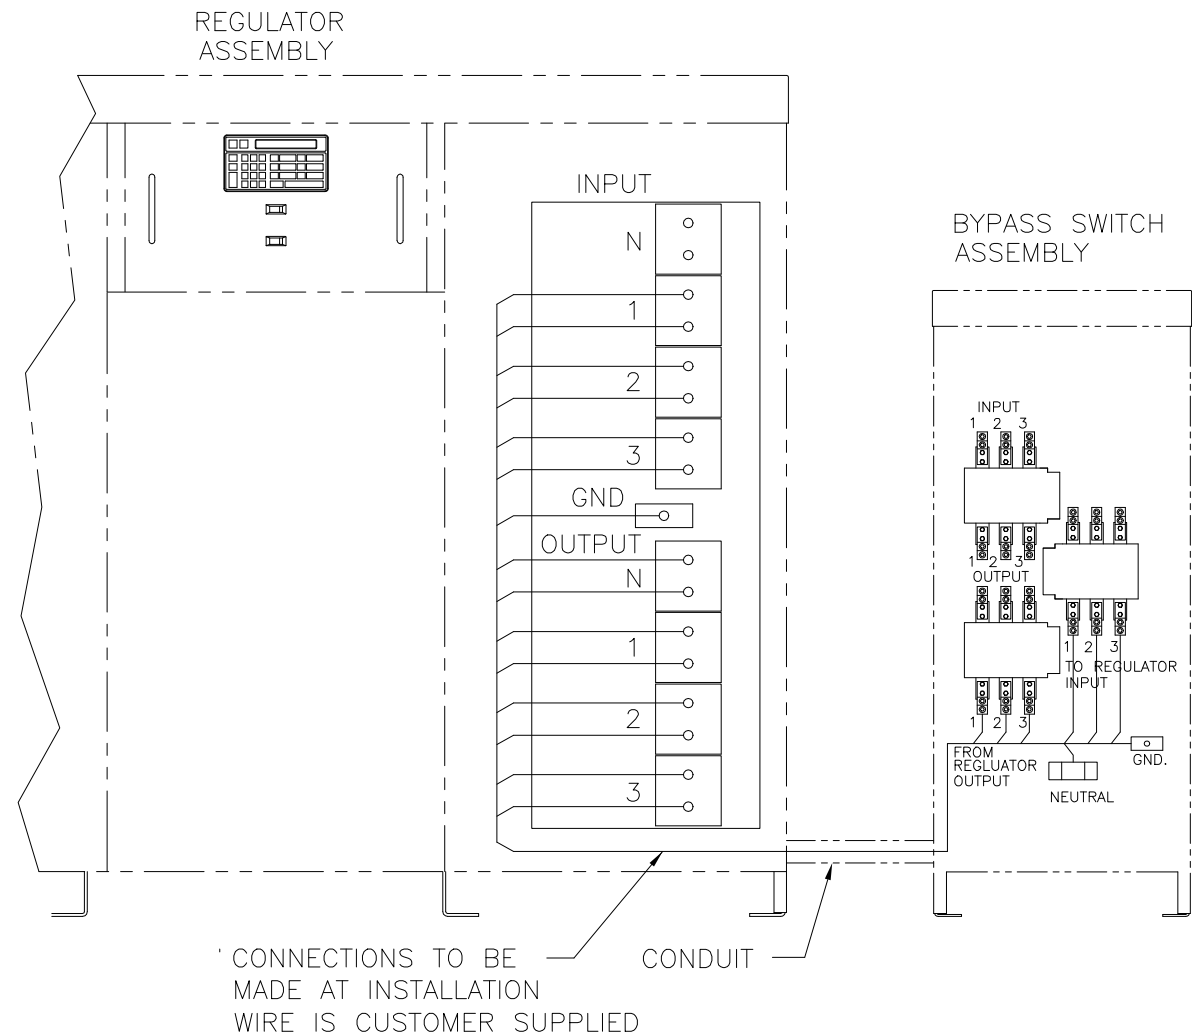
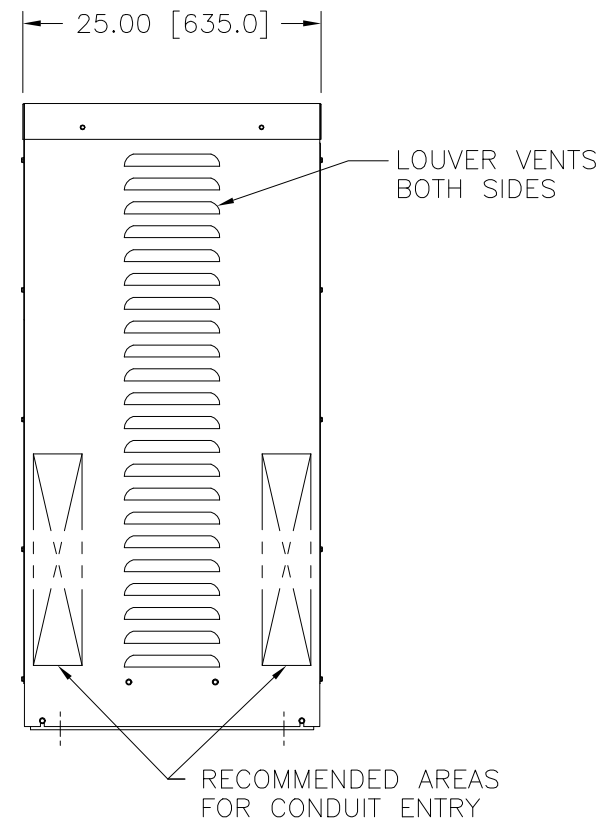


BYPASS SWITCH: WHEN THIS SWITCH IS PLACED IN THE "BYPASS" POSITION, THE INCOMING LINE IS CONNECTED DIRECTLY TO THE OUTGOING LINE AND THE REGULATOR IS REMOVED FROM THE CIRCUIT. IN THE "NORMAL" POSITION, THE REGULATOR WILL CORRECT FOR HIGH OR LOW SUPPLY LINE VOLTAGES WHILE MAINTAINING A CONSTANT PRESET OUTPUT VOLTAGE. THE "OFF" POSITION BREAKS POWER TO THE REGULATOR AND BYPASS CIRCUITS. THIS SWITCH IS A LOAD BREAK DEVICE AND MAY BE USED FOR A SERVICE DISCONNECT.

BYPASS SWITCH RATINGS			
THREE PHASE	50/60	600	600
WIRING	HERTZ	VOLTS	AMPS

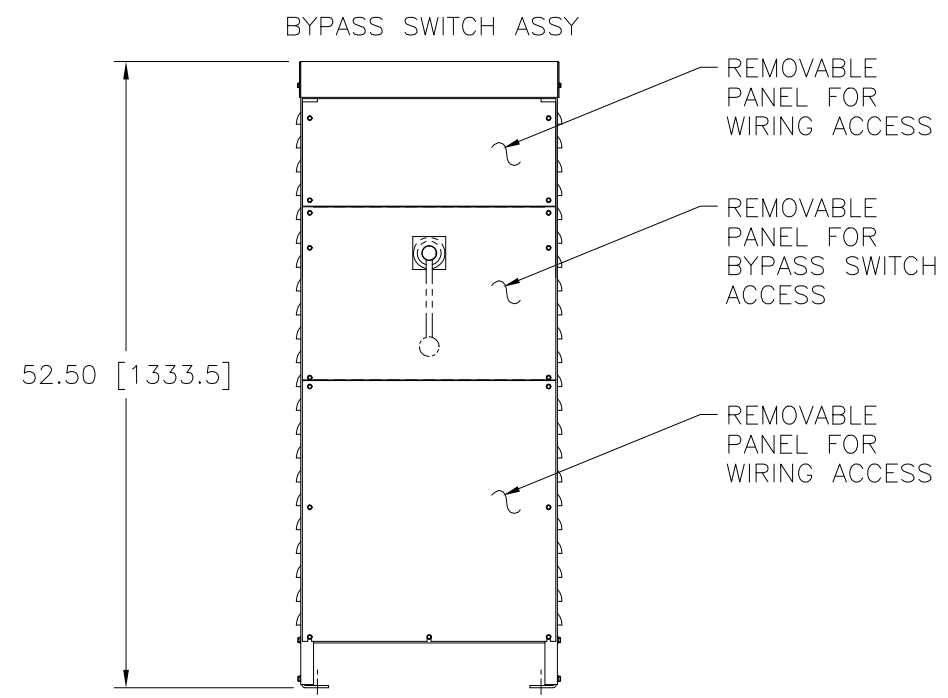

WIRE RANGES FOR CUSTOMER WIRING  
 INPUT/OUTPUT TERMINALS: (4)(600MCM-#2 AWG) COMPRESSION PER PHASE  
 TO/FROM REGULATOR TERMINALS: (2)(600MCM-#2 AWG) COMPRESSION PER PHASE  
 NEUTRAL TERMINALS: (4)(500MCM-#4 AWG) COMPRESSION  
 GROUND TERMINAL: (1)(2/O-#14 AWG) COMPRESSION