

Go to VARIAC.com
 to purchase and for
 technical support.
 Made in the USA

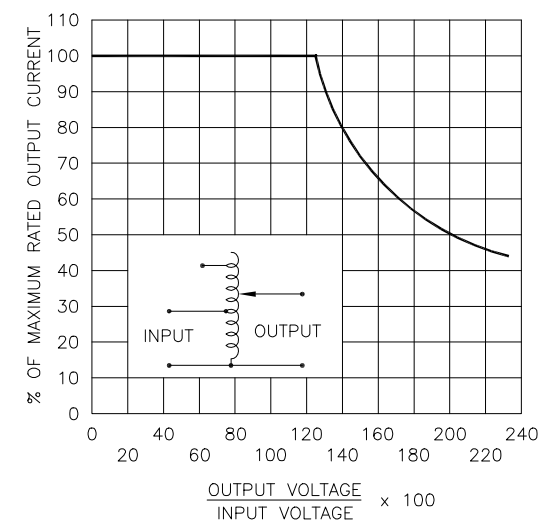
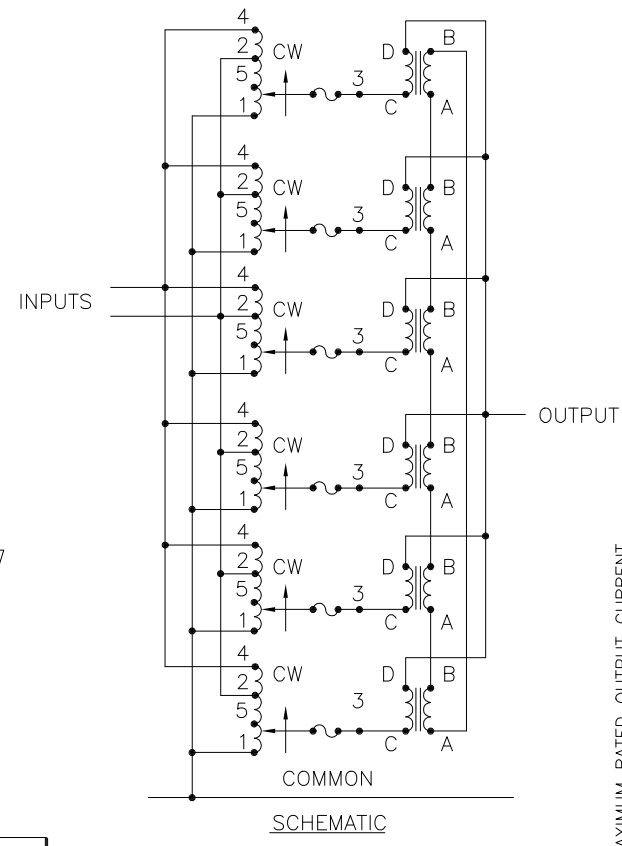
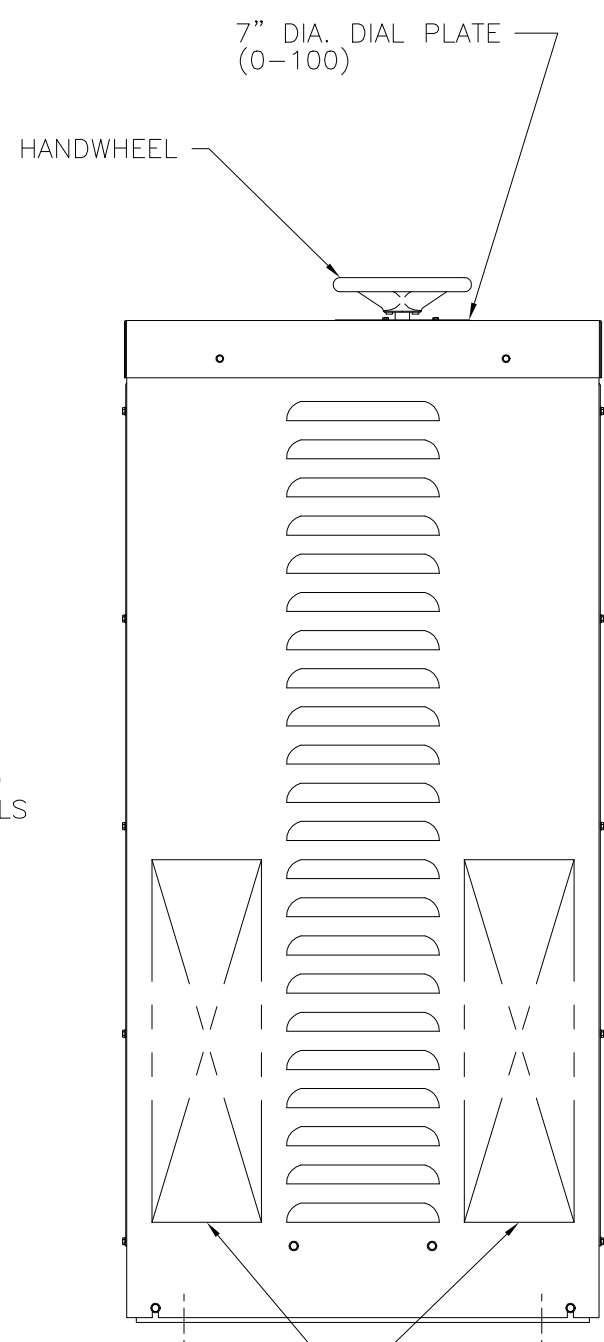
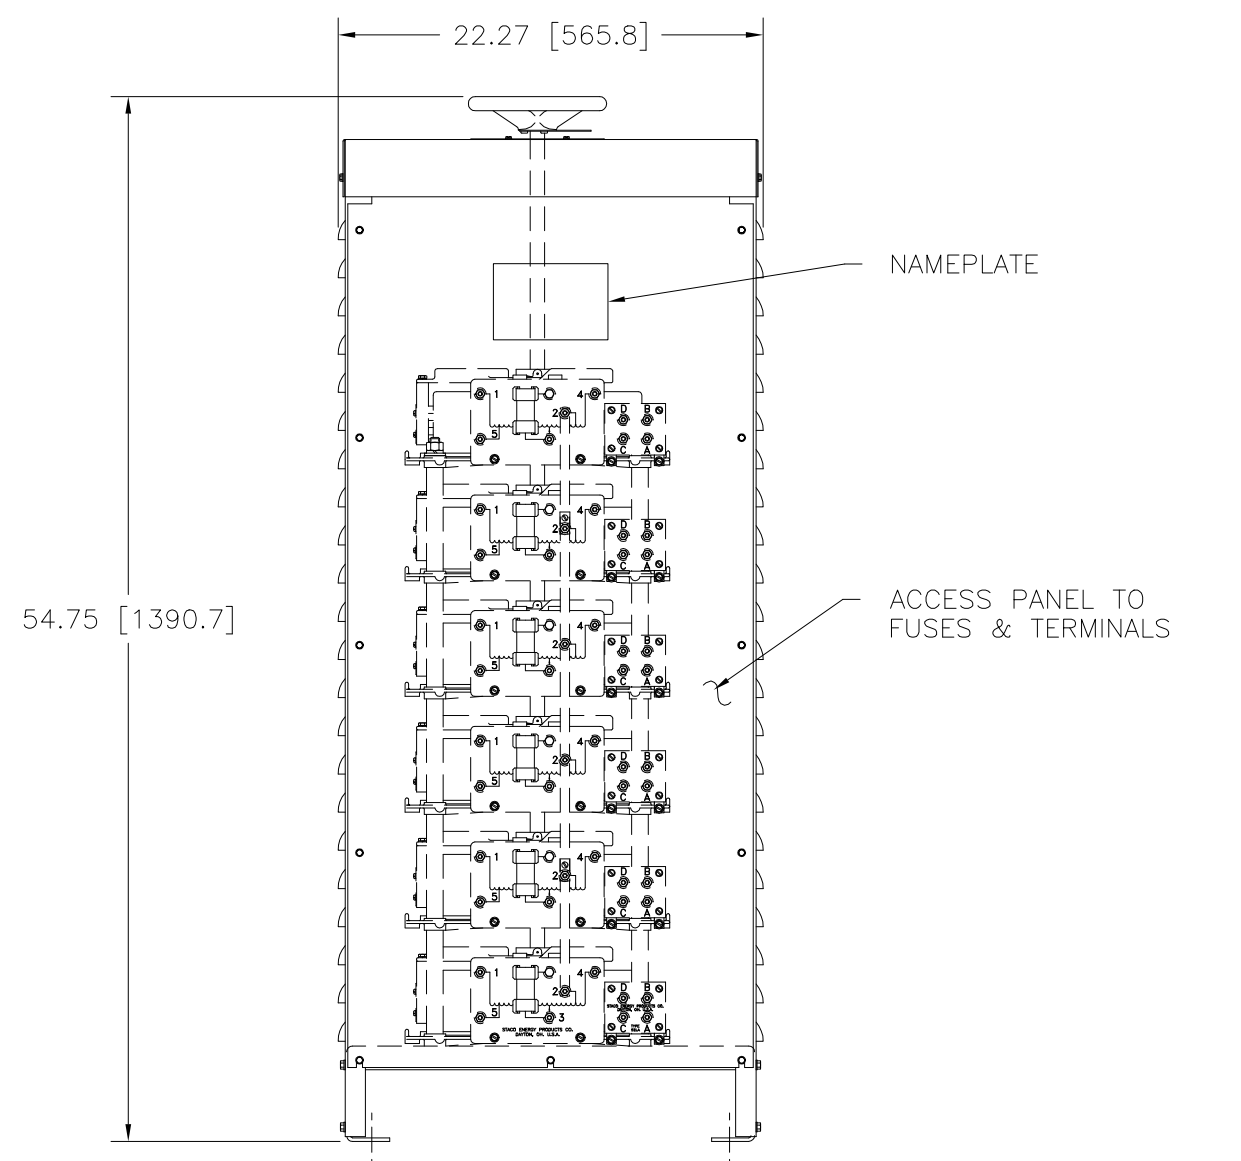
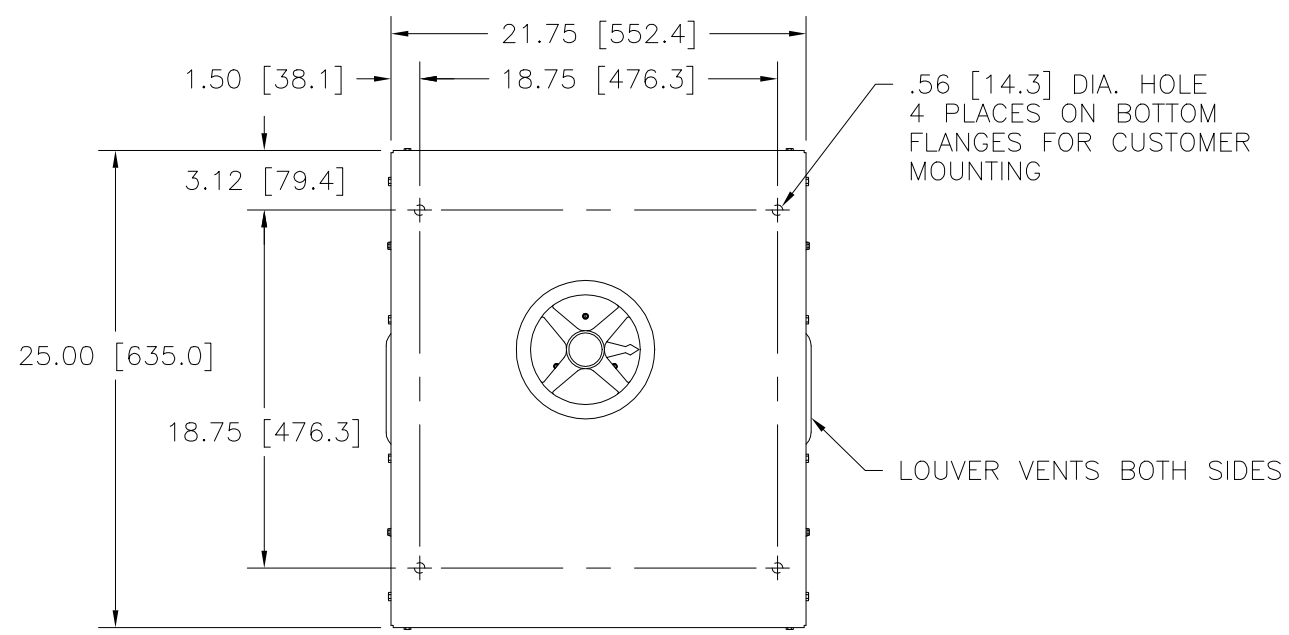


FIGURE A
 MAXIMUM OUTPUT CURRENT OF ANY
 DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER
 UNIT OPERATED AT LOWER INPUT VOLTAGE.

* MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25% ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE, FIGURE A.

++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, FIGURE A.

V.D. = VOLTAGE DOUBLER.

SPECIFICATIONS								
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM TOP	
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD			INPUT	OUTPUT
SINGLE PHASE PARALLEL	240	50/60	0-240	168	40.3	CW	1-4	1-D
			0-280	168	47.0	CW	1-2	1-D
	120	50/60	0-280	168-72 V.D.	20.4 ++	CW	1-5	1-D

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #	UNITS	TITLE:	
DECIMALS .12	IN [mm]	SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 5021E-6P	
MATERIAL:	ALL DIMENSIONS APPLY AFTER PLATING	DRAWN BY: TIM RAU CHECKER: DATE ENGINEER: DATE	FIRST USED ON: 3/25/98 DO NOT SCALE DWG. CUSTOMER APPROVAL: DATE
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.		DATE: 3/25/98 SCALE: .2=1 SHEET 1 OF 1	DWG. NO. 031-7500