

Go to VARIAC.com
 to purchase and for
 technical support.
 Made in the USA




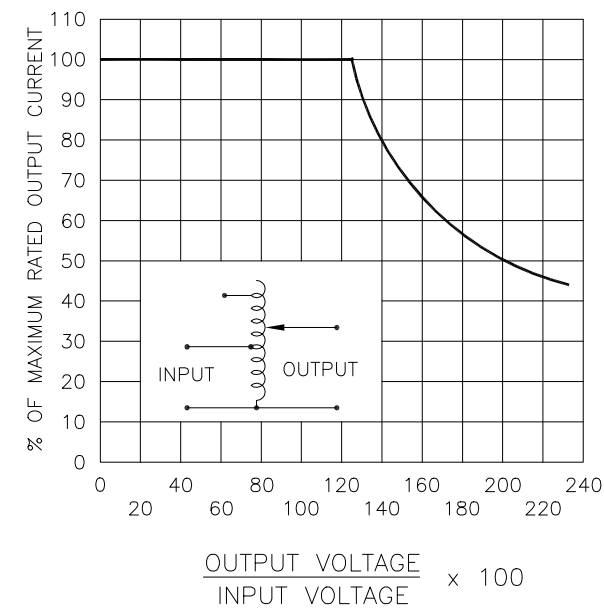


FIGURE A
 MAXIMUM OUTPUT CURRENT OF ANY DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER UNIT OPERATED AT LOWER INPUT VOLTAGE.

MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25 PERCENT ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE (SEE FIGURE A).
 ‡ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, (SEE FIGURE A).

SPECIFICATIONS								
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR INCREASE VOLTAGE	TERMINAL CONNECTIONS	
	VOLTS	HERTZ	VOLTS	MAX. AMPS	MAX. KVA		FOR INCREASING VOLTAGE AS VIEWED FROM ROTOR END	
SINGLE PHASE	240	50/60	0-240	35	8.4	CW	2-4	2-3
			0-280	35	9.8	CCW	4-2	4-3
	120	50/60	0-280	28-12# V.D.	4.2 ‡	CW	2-5	2-3
						CCW	4-1	4-3
						2-6	2-3	
						4-7	4-3	

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS .XX .01 .12 .002 .005
 HOLES .12 .002 .005
 ANGLES 1°
 DRAFT 1-1/2°
 UNITS IN [mm]
 MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING
 TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 6020CT
 DRAWN BY: TIM RAU DATE: 5/27/97 FIRST USED ON: DO NOT SCALE DWG. CUSTOMER APPROVAL: DATE:
 CHECKER: DATE: WEIGHT APPROX. 63 LBS CODE IDENT. NO. 83008 DWG. NO. 032-7416
 ENGINEER: DATE: SCALE .5=1 SHEET 1 OF 1

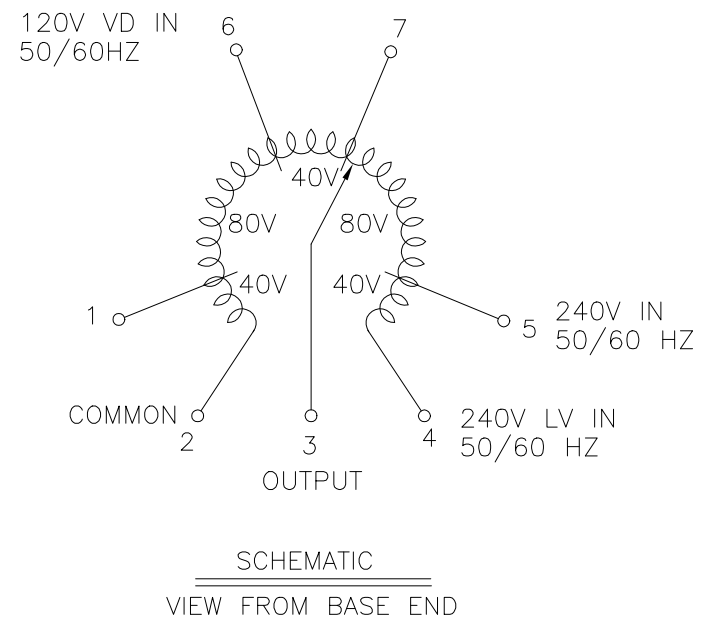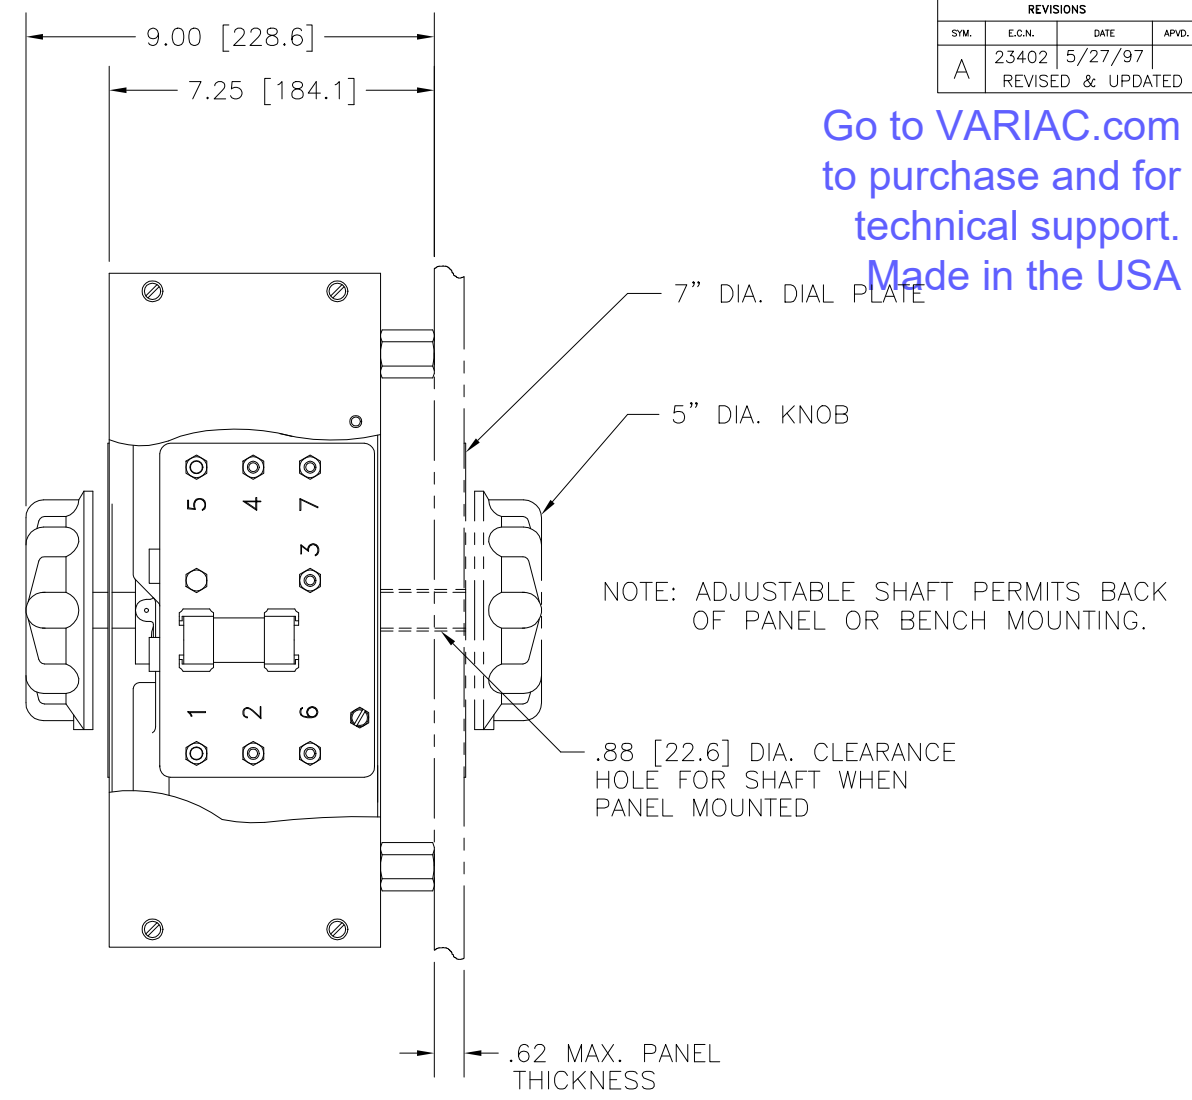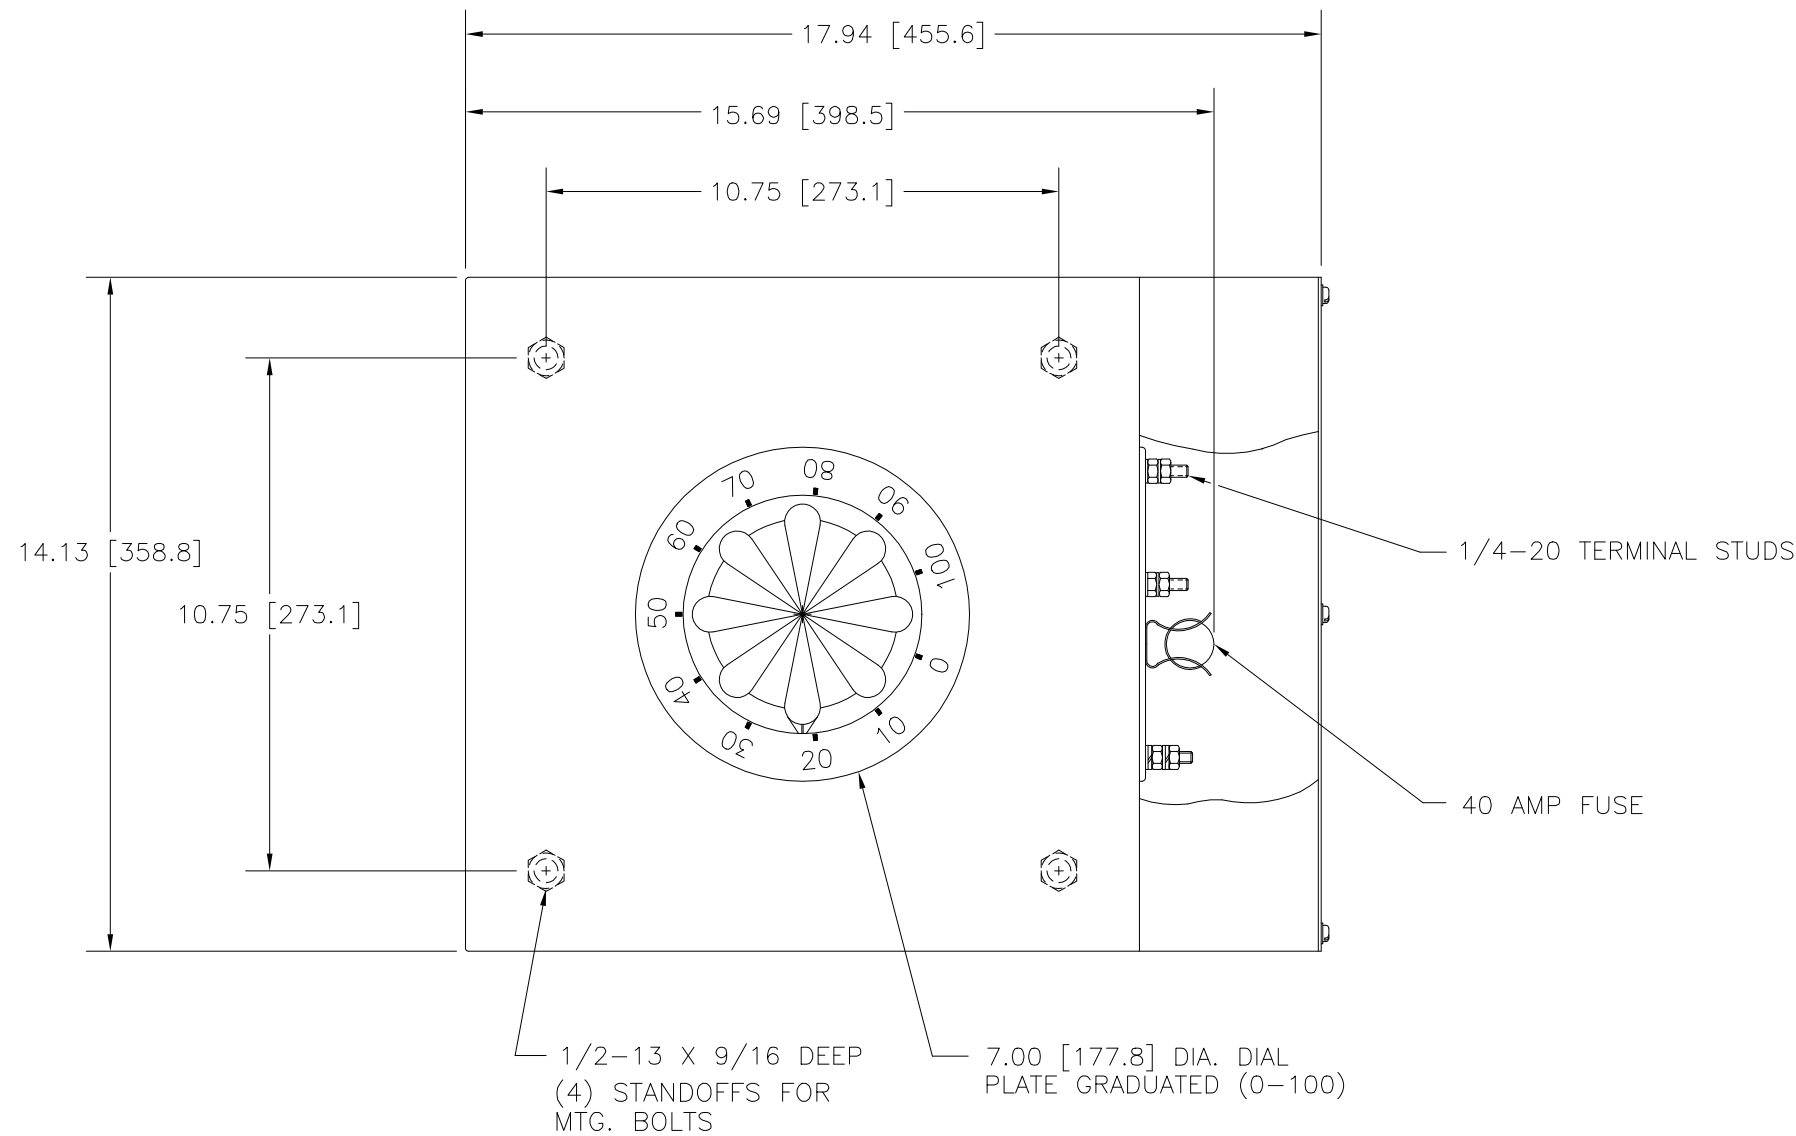