

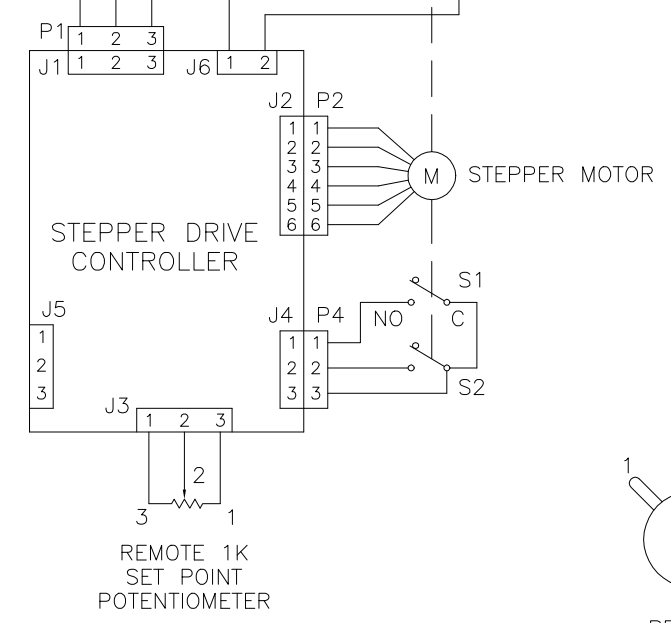
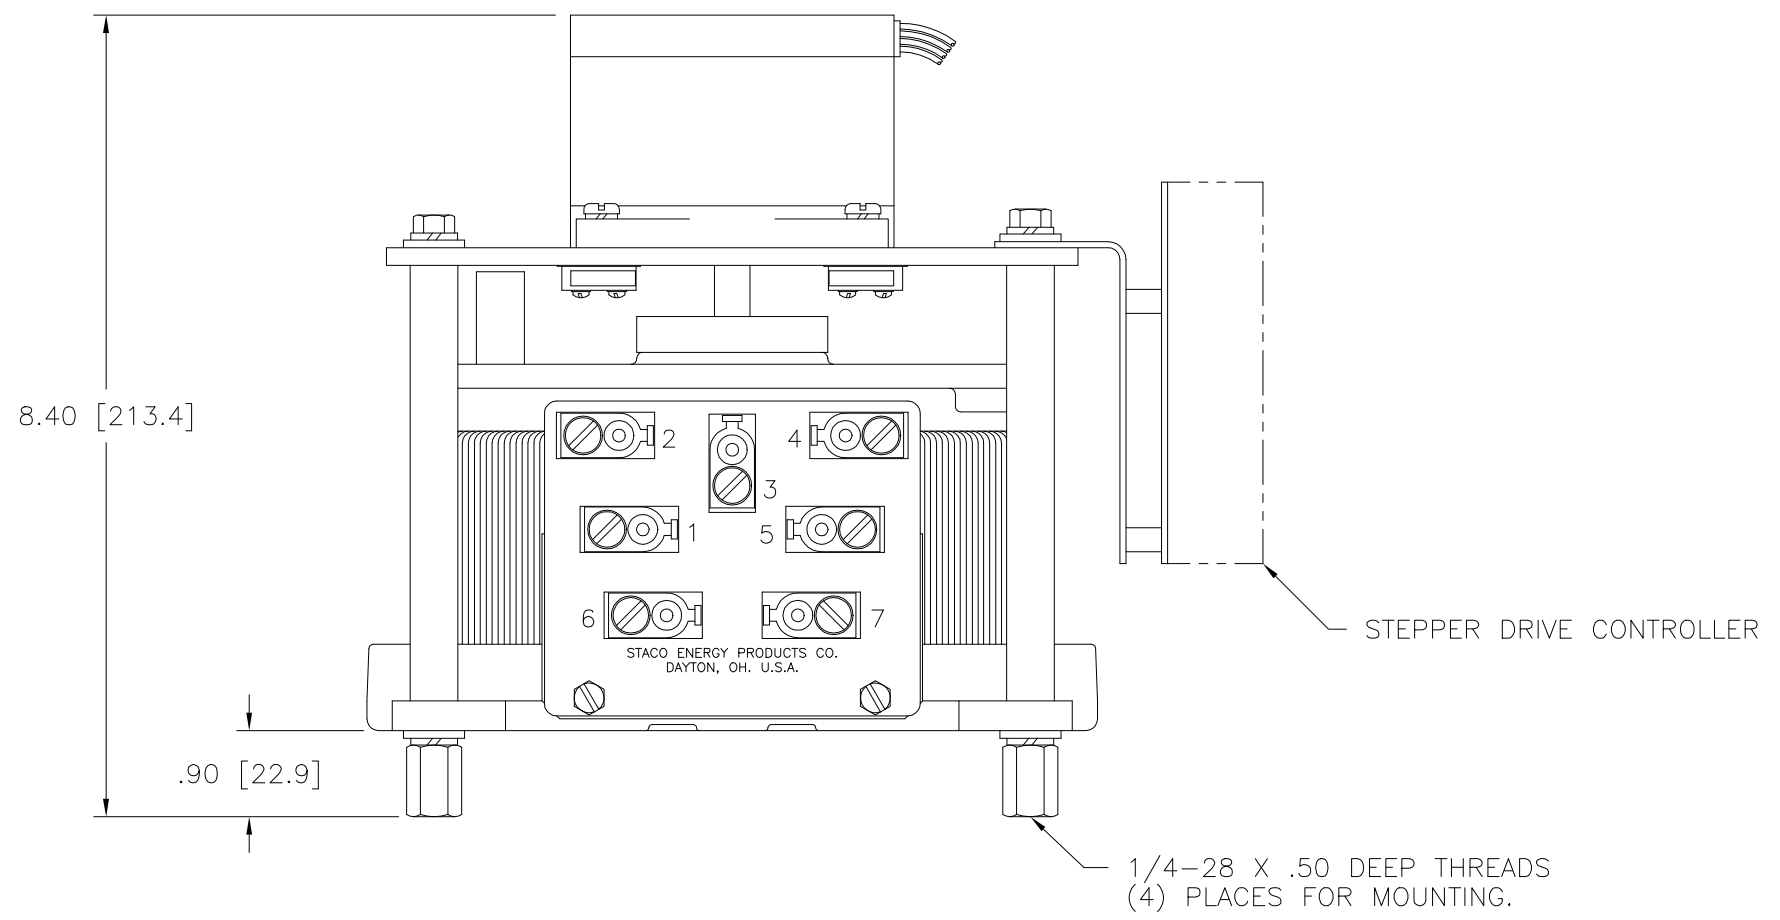
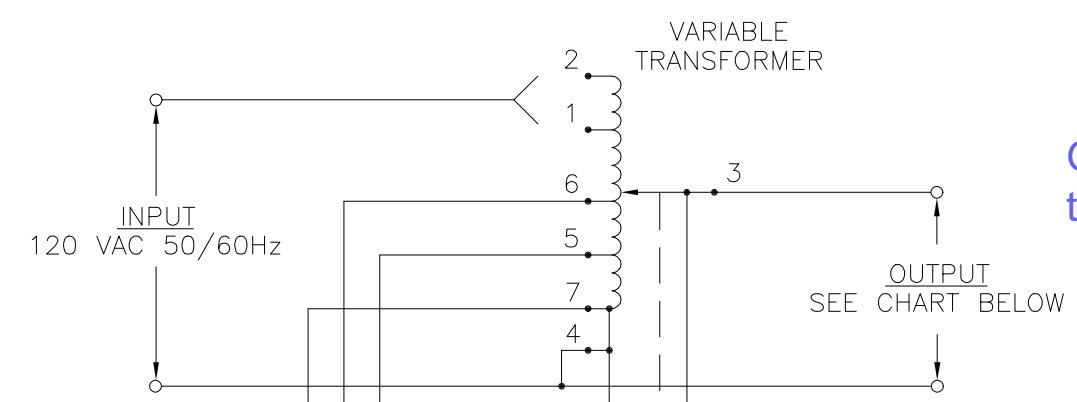


DWG. NO.	095-1805		
REVISIONS			
SYM.	E.C.N.	DATE	APVD.
A	24028	8/18/99	
CLARIFIED 5VDC NOTE			

Go to VARIAC.com
to purchase and for
technical support.
Made in the USA

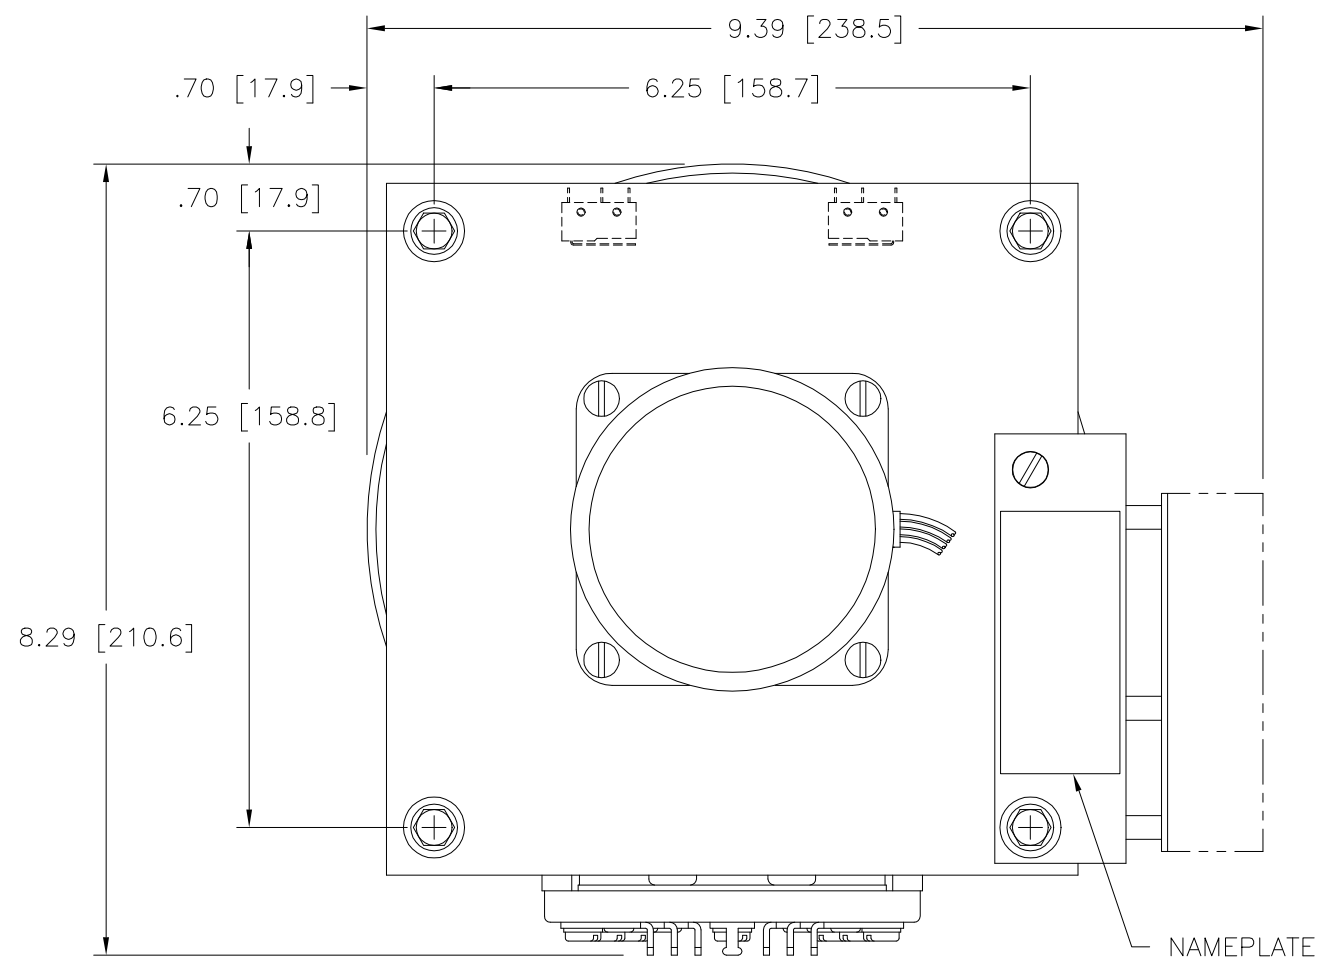

SET POINT ADJUSTMENT:
THE OUTPUT SET POINT MAY BE ADJUSTED WITH THE REMOTE 1K POTENTIOMETER PROVIDED OR WITH A 0-5 VDC SIGNAL TO THE J3 CONNECTOR ON THE STEPPER DRIVE CONTROL. MAKE CONNECTIONS TO J3-2(+) & J3-3(-). A NOMINAL +5 VDC SETPOINT SUPPLY IS AVAILABLE AT J3-1 (ADJUSTABLE AT TRIMPOT R22).

SPECIFICATIONS									
WIRING	INPUT		OUTPUT				TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD	CONSTANT IMPEDANCE LOAD		INPUT	OUTPUT	
SINGLE PHASE	120	50/60	0-120	MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	2-4	4-3
				0-140	25	3.00	30	3.6	1-4

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #				UNITS		TITLE: SPEC. CONTROL DRAWING						
DECIMALS	HOLE	ANGLE	DRAFT	IN [mm]		STEPPER DRIVEN VARIABLE TRANSFORMER MODEL SD2510						
.XX	.0005-.0010	.002	1°	ALL DIMENSIONS APPLY AFTER PLATING		DRAWN BY S.A. SMITH		DATE 12/14/95	FIRST USED ON	DO NOT SCALE DWG.	CUSTOMER APPROVAL	DATE
MATERIAL:				WEIGHT APPROX. 25.5 LBS		CHECKER		DATE	SCALE	CODE IDENT. NO. 83008	DWG. NO. 095-1805	
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				SCALE 1=1		ENGINEER		DATE	SHEET 1 of 1	DWG. NO. 095-1805		