

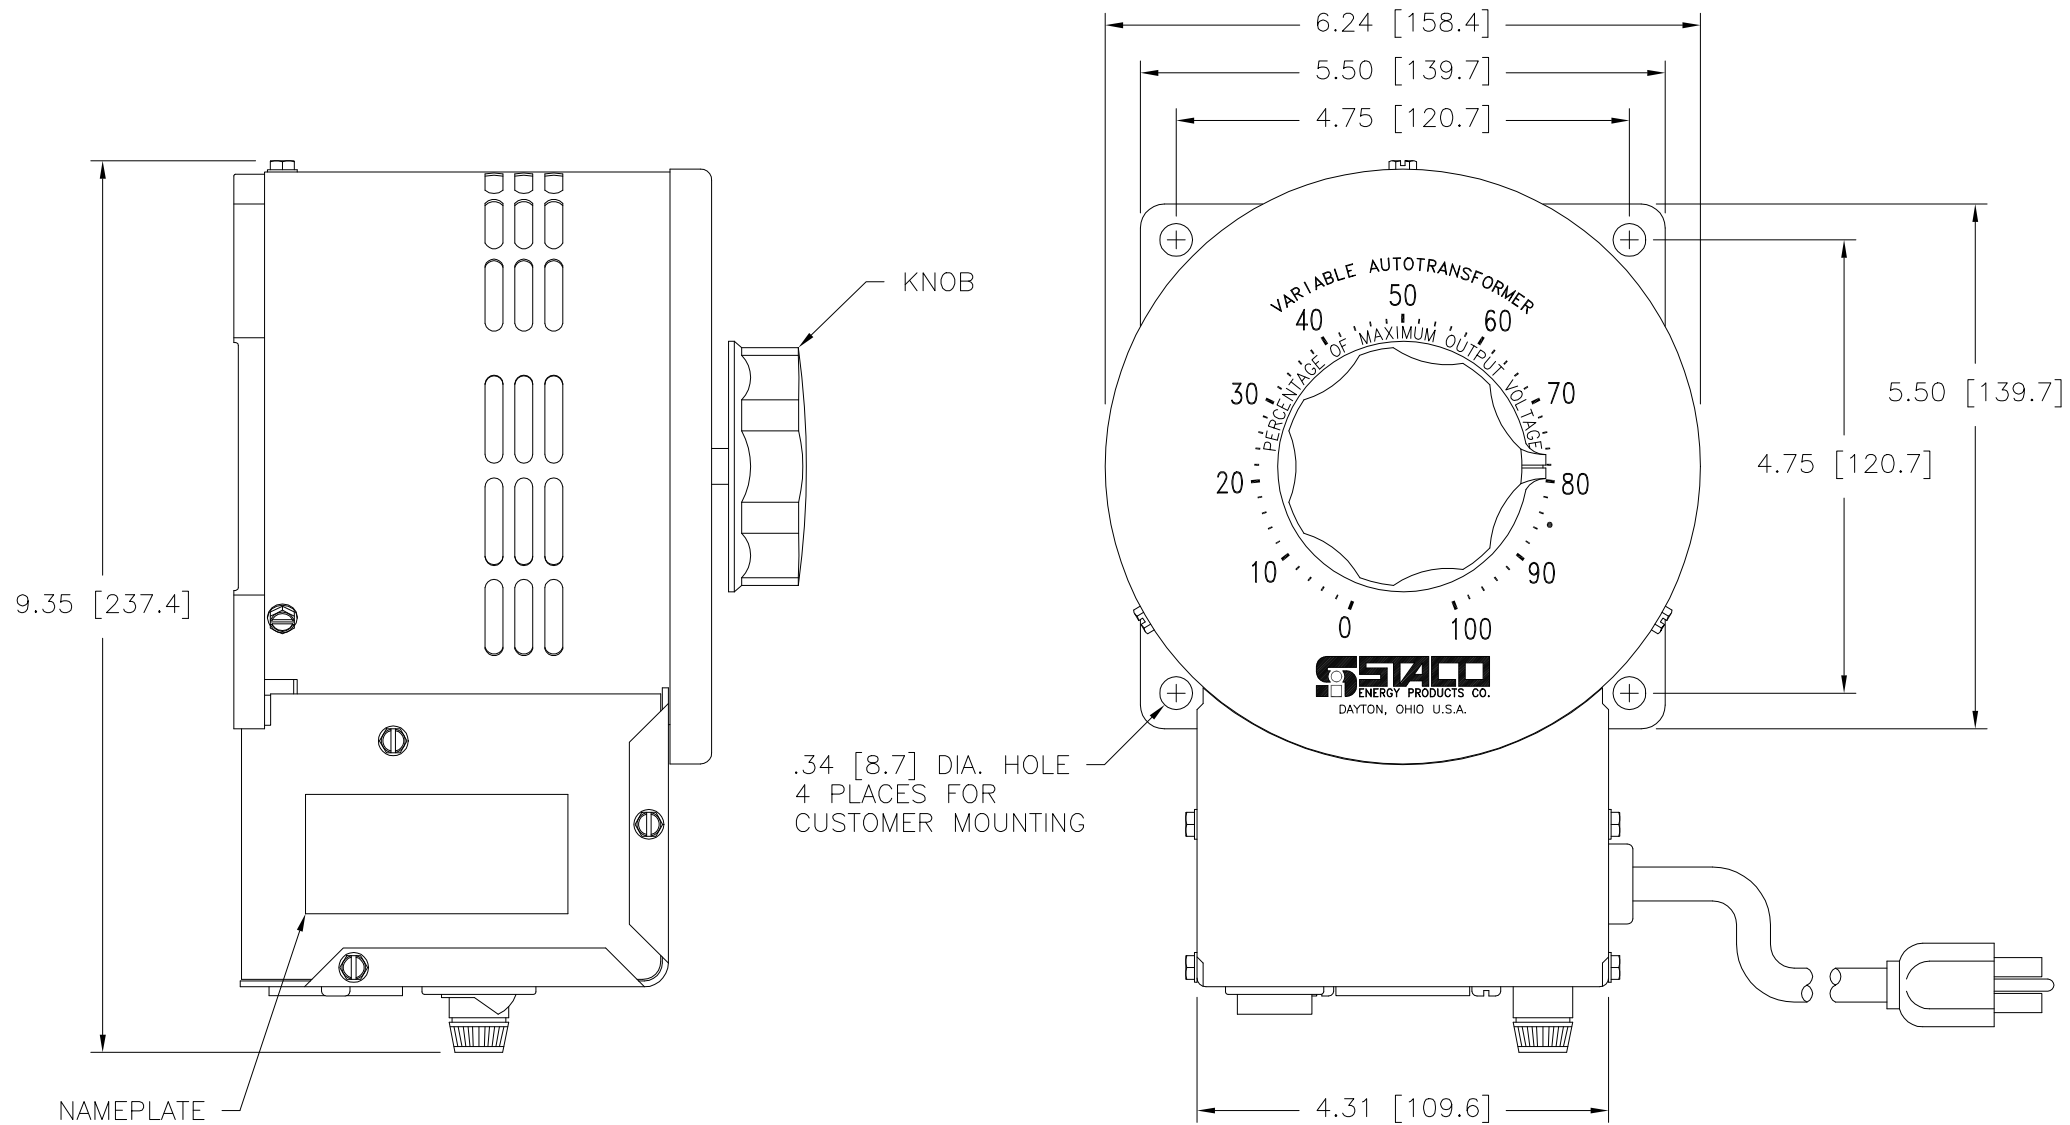


Go to VARIAC.com
to purchase and for
technical support.
Made in the USA

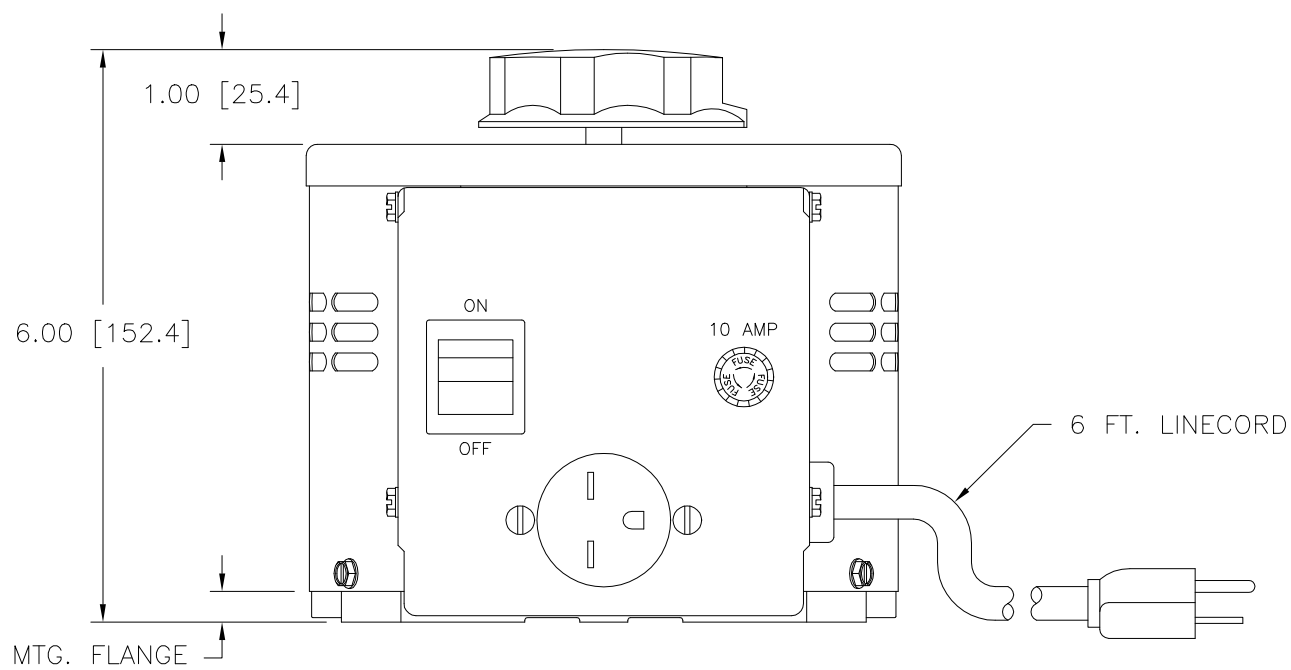

.34 [8.7] DIA. HOLE
4 PLACES FOR
CUSTOMER MOUNTING

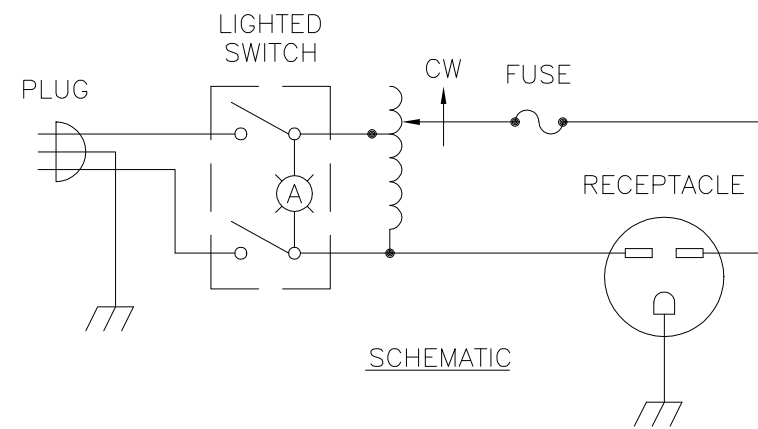

.32 [8.1] THK. MTG. FLANGE

SPECIFICATIONS				
WIRING	INPUT		OUTPUT	
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD
SINGLE PHASE	240	50/60	0-280	MAX. AMPS MAX. KVA
				9.5 2.66

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #		UNITS		TITLE: SPEC. CONTROL DRAWING		DRAWN BY		DATE		FIRST USED ON		DO NOT		CUSTOMER APPROVAL	
DECIMALS	HOLES	ANGLES	DRAFT	IN	MM	S.A. SMITH		5/17/96		3PN1520B		SCALE DWG.		DATE	
.XX	.0000	.01	1°	1-1/2°						WEIGHT APPROX.		CODE IDENT. NO.		DWG. NO.	
										22 LBS		83008		031-3945	
MATERIAL:		ALL DIMENSIONS APPLY AFTER PLATING		SCALE		ENGINEER		DATE		SCALE		SHEET 1 OF 1		D	
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.															

