


.28 [7.1] THK. MTG. FLANGE



SCHMATIC  
 VIEW FROM BASE END  
 FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS													
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS					
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD	CONSTANT IMPEDANCE LOAD	FOR INCREASING VOLTAGE AS VIEWED FROM BASE END							
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA		INPUT	JUMPER	OUTPUT		
SINGLE PHASE	240	60	0-240	5.0	1.20	7.0	1.68	CW	1-4	---	4-3		
								CCW	1-4	---	1-3		
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #			TITLE: SPEC. CONTROL DRAWING			DRAWN BY			DATE	FIRST USED ON	DO NOT SCALE DWG.	CUSTOMER APPROVAL	DATE
DECIMALS .005			HOLES .002			ANGLES 1°			DRAFT 1-1/2"			UNITS IN [mm]	
MATERIAL:			ALL DIMENSIONS APPLY AFTER PLATING			CHECKER			DATE	WEIGHT APPROX. 10.25 LBS	CODE IDENT. NO. 83008	DWG. NO. 031-3306	DWG. NO. 031-3306
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			SCALE 1=1			SHEET 1 OF 1							

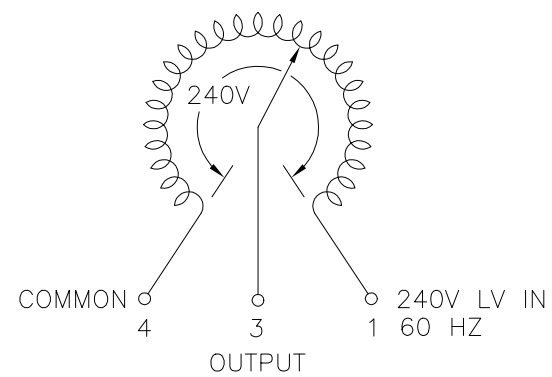