

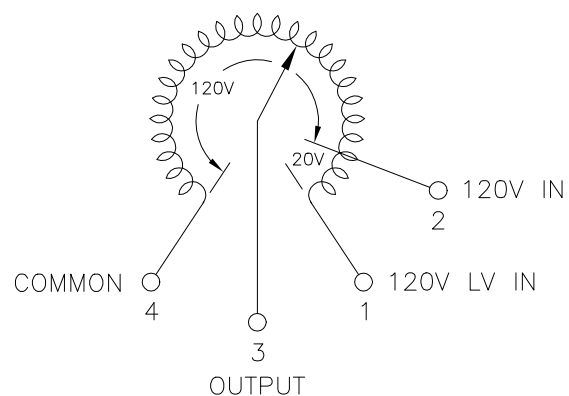


.25 [6.4] WIDE X .03 [0.8] THICK QUICK CONNECT TERMINALS WITH SOLDER LUGS AT OPPOSITE ENDS

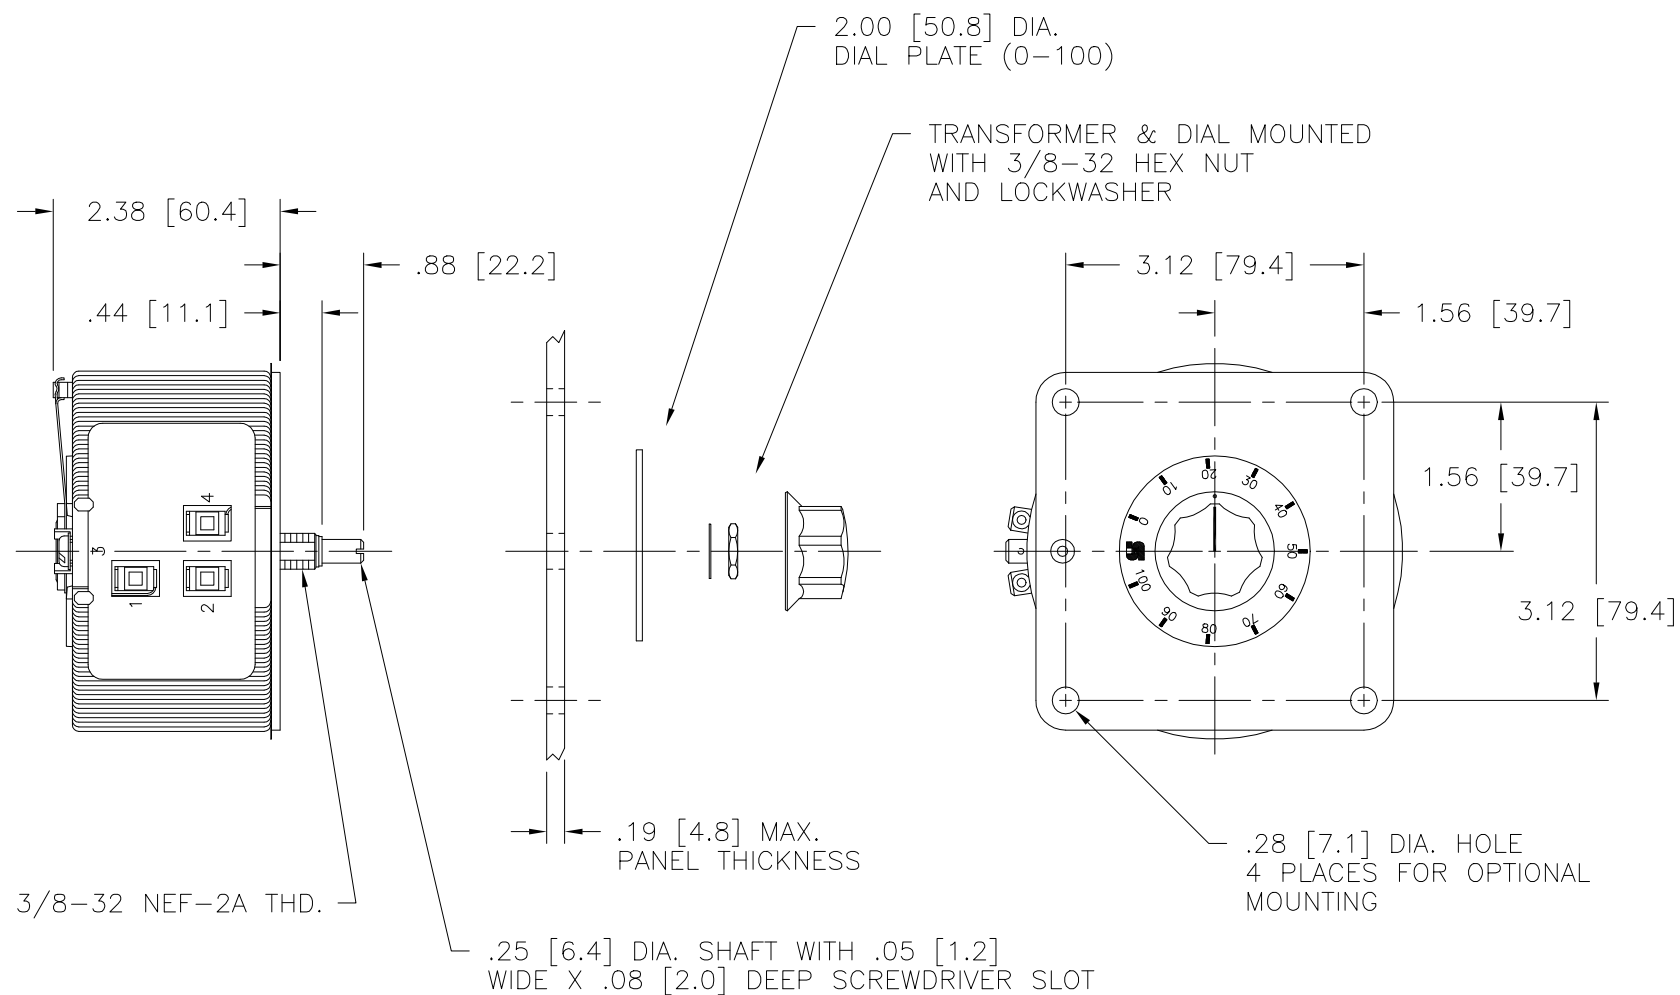

SCHMATIC VIEWED FROM BASE END

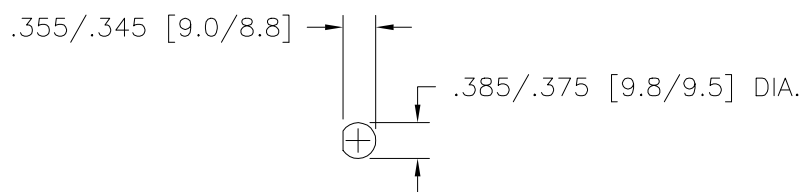

SHAFT PANEL MTG. DETAIL FLAT TOWARDS TERMINALS

SPECIFICATIONS									
WIRING	INPUT		OUTPUT				TERMINAL CONNECTIONS AS VIEWED FROM BASE END		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		INPUT	OUTPUT
SINGLE PHASE	120	50/60	0-120	MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	1-4	4-3
				0-140	5.0	0.60	7.0		
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #			TITL: SPEC. CONTROL DRAWING						
DECIMALS .XX .XXX .005			Holes .06 .01						
MATERIAL:			UNITS IN [mm]			DRAWN BY S.A. SMITH			
ALL DIMENSIONS APPLY AFTER PLATING			DATE 2/6/96			FIRST USED ON DO NOT SCALE DWG.			
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			CHECKER			DATE			
ENGINEER			DATE			WEIGHT APPROX. 4.25 LBS			
			SCALE 1=1			CODE IDENT. NO. 83008			
			SHEET 1 OF 1			DWG. NO. 031-0825			