



RECOMMENDED AREAS FOR CONDUIT ENTRY



**MOTOR CIRCUIT**  
 120V, 50/60 HZ  
 \* ROTATION AS VIEWED FROM TOP END  
 MOTOR SPEEDS: 30, 60 SEC.

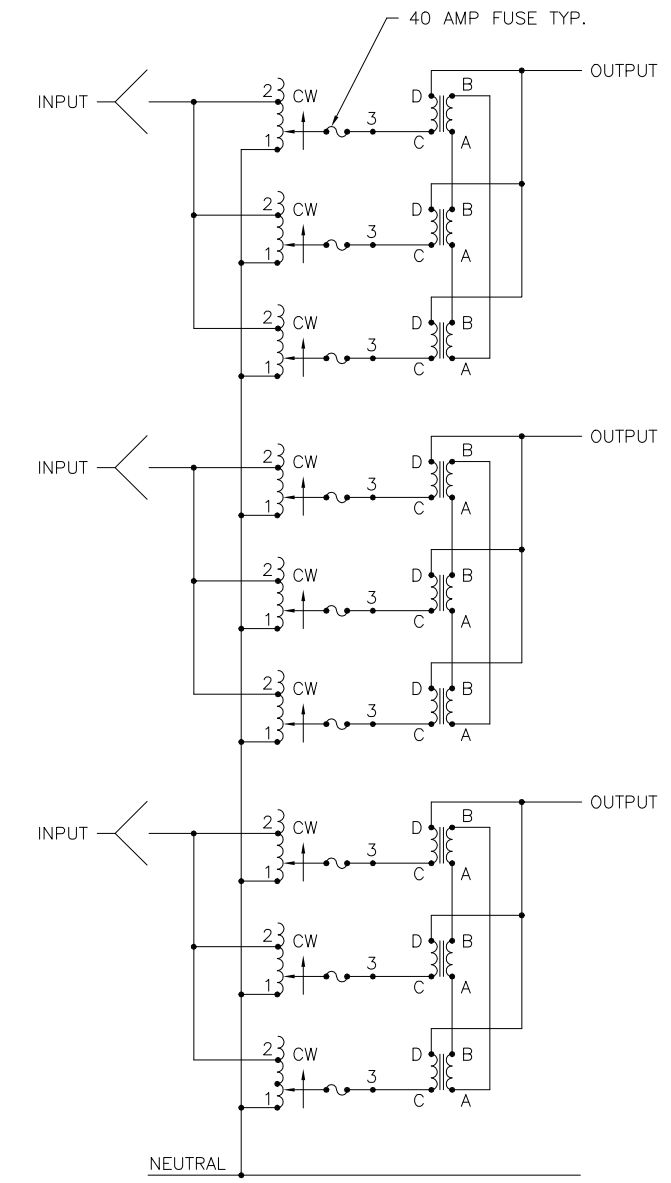

SCHMATIC

SPEED (SECONDS)	MODEL NUMBER
30	30M5011E-9Y
60	60M5011E-9Y

WIRING	INPUT		OUTPUT		SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM TOP		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		INPUT	OUTPUT	
				MAX. AMPS				MAX. KVA
THREE PHASE WYE	240	60	0-280	150	72.5	CW	2-2-2 D-D-D	

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS .XX .XXX .12 .005 HOLES .03 ANGLES 1° DRAFT 1-1/2° UNITS IN [mm]

MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING

TITLE: SPECIFICATION CONTROL DRAWING  
 MOTORIZED VARIABLE TRANSFORMER  
 30 & 60M5011E-9Y

STACO ENERGY PRODUCTS CO. DAYTON, OHIO U.S.A.

DRAWN BY	DATE	FIRST USED ON	DO NOT SCALE DWG.	CUSTOMER APPROVAL	DATE
TIM RAU	12/14/95				
CHECKER	DATE	WEIGHT APPROX.	CODE IDENT. NO. 83008	DWG. NO.	DATE
ENGINEER	DATE	SCALE .125=1	SHEET 1 OF 1	D	031-7018