


.28 [7.1] THK. MTG. FLANGE

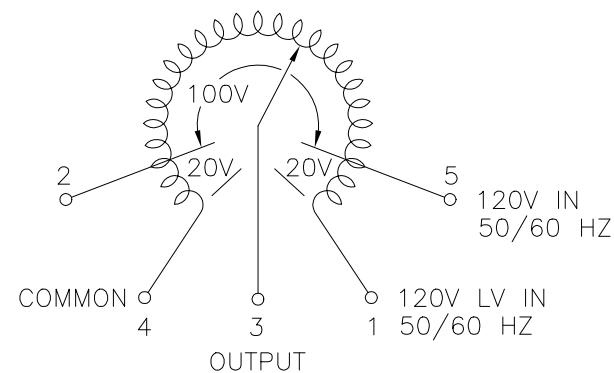

SCHMATIC
 VIEW FROM BASE END
 FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS												
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS				
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END				
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT	
SINGLE PHASE	120	50/60	0-120	10	1.2	13	1.56	CW	1-4	---	4-3	
			0-140	10	1.4	---	---	CCW	1-4	---	1-3	
								CW	4-5	---	4-3	
								CCW	1-2	---	1-3	

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #
 DECIMALS HOLES ANGLES DRAFT
 XX .0005 .002 1° 1-1/2°
 XXX .005

TITLE: SPEC. CONTROL DRAWING
 VARIABLE TRANSFORMER
 MODEL: 1010BCT



MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING

DRWN BY S.A. SMITH DATE 9/17/97
 CHECKER DATE
 ENGINEER DATE

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #
 DECIMALS HOLES ANGLES DRAFT
 XX .0005 .002 1° 1-1/2°
 XXX .005