


.28 [7.1] THK. MTG. FLANGE



SCHMATIC
 VIEW FROM BASE END
 FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS										
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD	CONSTANT IMPEDANCE LOAD	FOR INCREASING VOLTAGE AS VIEWED FROM BASE END		INPUT	JUMPER	OUTPUT
SINGLE PHASE	120	60	0-120	MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	CW	1-4	4-3
				12	1.44	15	1.80	CCW	1-4	1-3
<small>UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS .XX .0005 .06 .002 .005 Holes Angles Draft 1° 1-1/2° UNITS IN [mm] TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 1210BCT</small>										
<small>MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING</small>										
<small>The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.</small>										
DRAWN BY	DATE	FIRST USED ON	DO NOT SCALE DWG.	CUSTOMER APPROVAL		DATE				
S.A. SMITH	9/24/97			WEIGHT APPROX. 10.5 LBS		CODE IDENT. NO. 83008	DWG. NO. 031-3006			
CHECKER	DATE	SCALE	1=1	SHEET 1 OF 1						
ENGINEER	DATE									

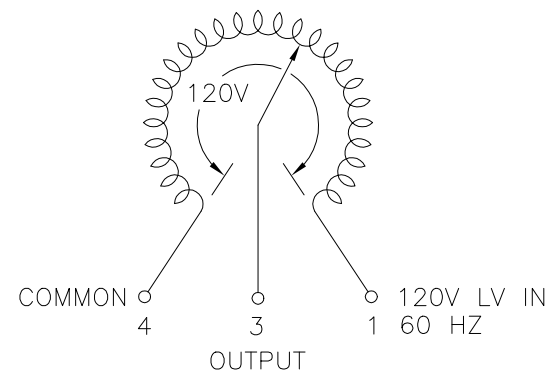