
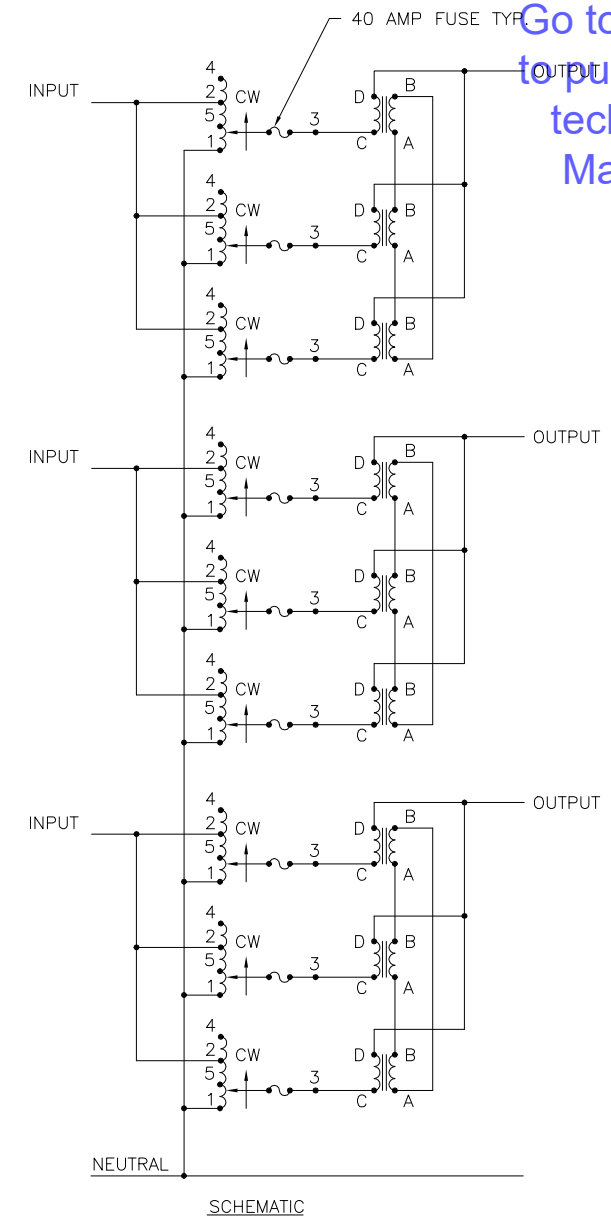
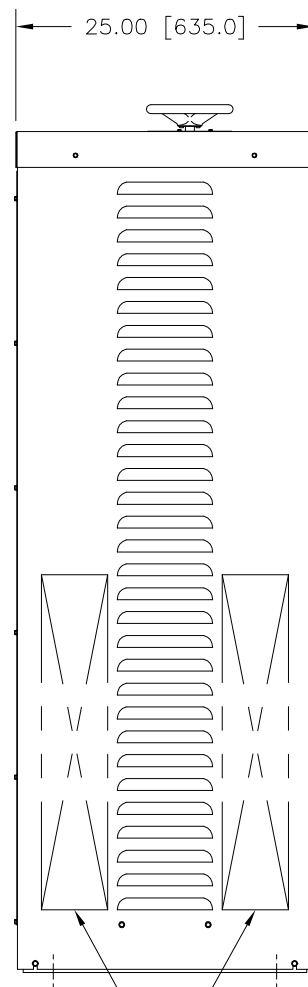


MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25 PERCENT ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE (SEE FIGURE A).

++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, (SEE FIGURE A).

V.D. = VOLTAGE DOUBLER.

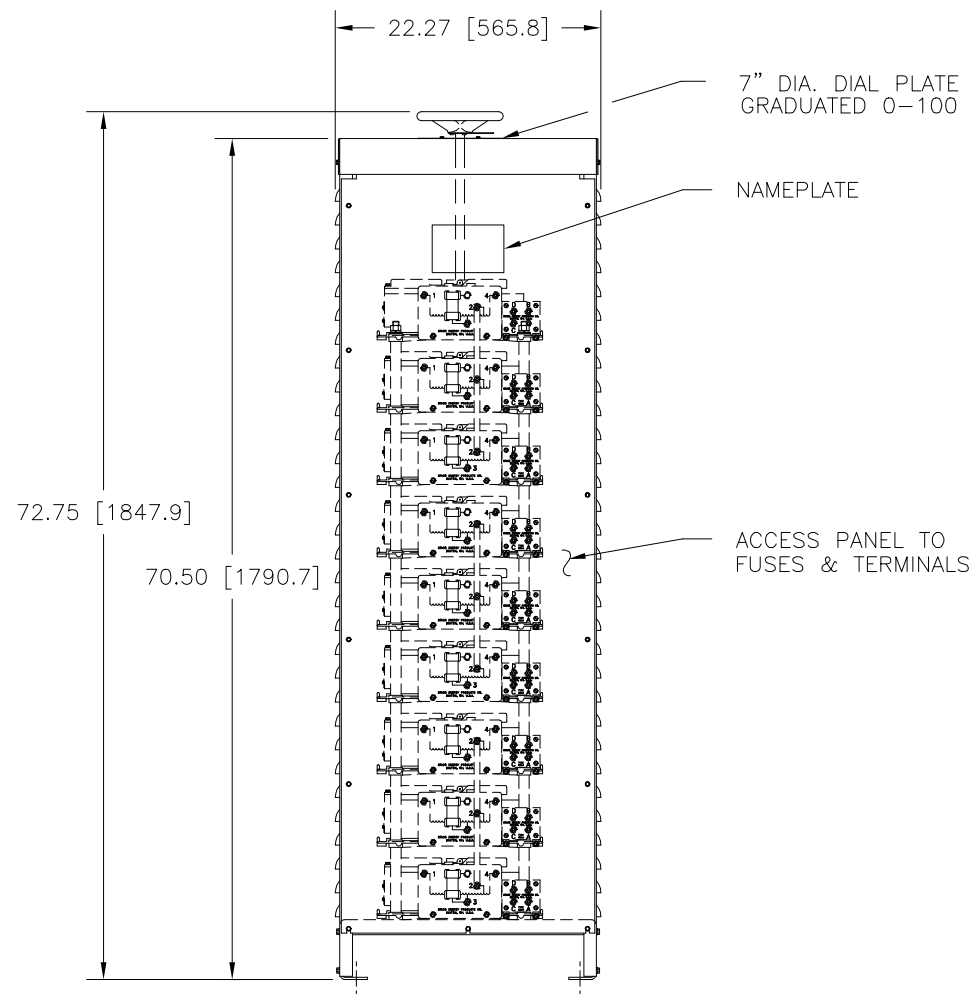

Go to VARIAC.com
 to purchase and for
 technical support.
 Made in the USA

SPECIFICATIONS								
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM TOP	
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD			INPUT	OUTPUT
THREE PHASE WYE	480	50/60	0-480	MAX. AMPS	MAX. KVA	CW	4-4-4	D-D-D
		60	0-560	84	81.5		2-2-2	D-D-D
	240	60	0-560	84*	35.0	CW	5-5-5	D-D-D
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #				UNITS		TITLE: SPEC. CONTROL DRAWING		
DECIMALS				IN [mm]		MOTORIZED VARIABLE XFMR.		
XX .0005				1-1/2"		TYPE: 5021E-9Y		
MATERIAL:				ALL DIMENSIONS APPLY AFTER PLATING		DRAWN BY: TIM RAU		
						DATE: 5/26/99		
						FIRST USED ON: DO NOT SCALE DWG.		
						CHECKER: DATE: WEIGHT APPROX. 717 LBS		
						ENGINEER: DATE: SCALE .125=1 SHEET 1 OF 1		
						CUSTOMER APPROVAL: DATE: DWG. NO. 031-8214		

