
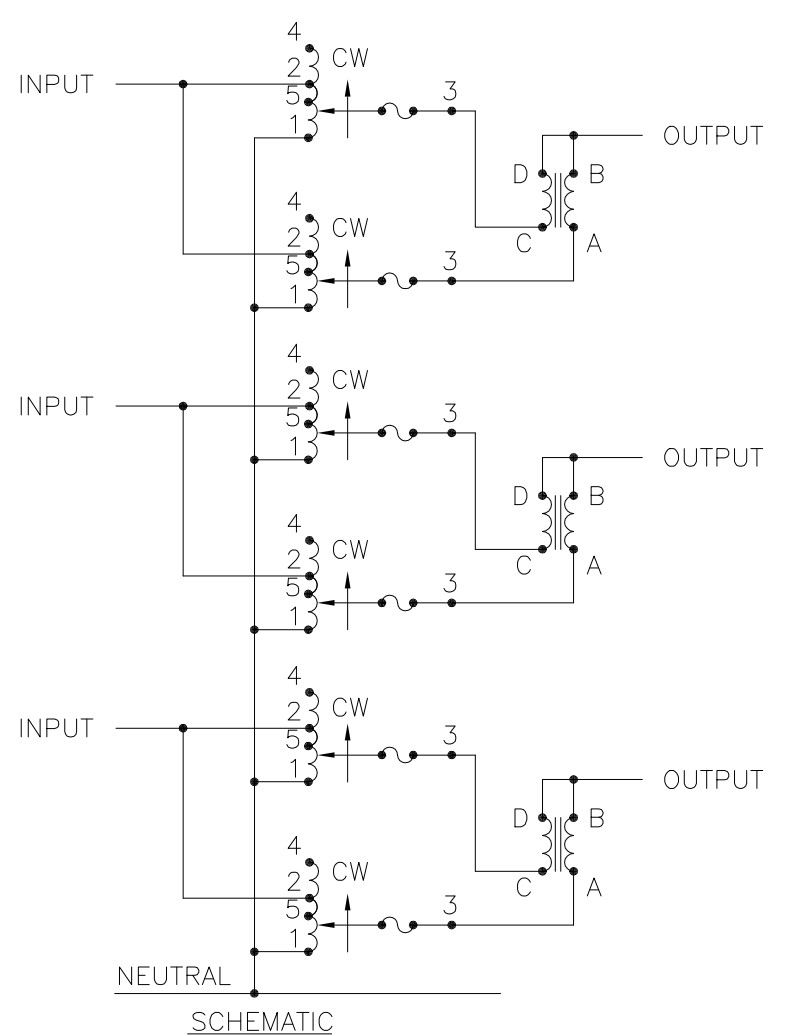


Go to VARIAC.com to purchase and for technical support. Made in the USA

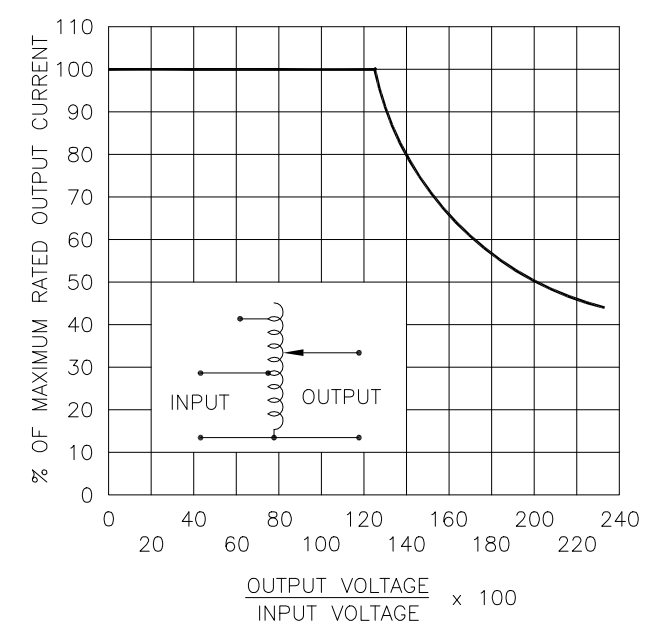

* MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25% ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE, FIGURE A.
 ++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, FIGURE A.
 V.D. = VOLTAGE DOUBLER.

WIRING	SPECIFICATIONS					SHAFT ROTATION FOR INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	INPUT		OUTPUT				FOR INCREASING VOLTAGE AS VIEWED FROM ROTOR END		
THREE PHASE WYE	VOLTS	HERTZ	VOLTS	MAX. AMPS	MAX. KVA	CW	INPUT	JUMPER	OUTPUT
	480	50/60	0-480	70	58.1		4-4-4	---	B-B-B
		60	0-560	70	67.8		2-2-2	---	B-B-B
240	60	0-560	70-30* V.D.	29.1++	5-5-5	---	B-B-B		

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS HOLES ANGLES DRAFT UNITS IN [mm]
 .XX .12 .002 1° 1-1/2" IN ALL DIMENSIONS APPLY AFTER PLATING

MATERIAL: _____

TITLE: SPEC. CONTROL DRAWING TYPE: 6020-6Y

STACO ENERGY PRODUCTS CO. A COMPONENTS CORPORATION OF AMERICA COMPANY DAYTON, OHIO U.S.A.

DRAWN BY: F. SEALE DATE: 8/4/97 FIRST USED ON: _____ DO NOT SCALE DWG. CUSTOMER APPROVAL: _____ DATE: _____
 CHECKER: _____ DATE: _____ WEIGHT APPROX. 485 1231.9 CODE IDENT. NO. 83008 DWG. NO. 032-8182
 ENGINEER: _____ DATE: _____ SCALE .25=1 SHEET 1 OF 1