


DWG. NO.	095-1930		
REVISIONS			
SYM.	E.C.N.	DATE	APVD.
A	24220	5/9/00	
ADDED TERMINAL RANGE			

Go to VARIAC.com
to purchase and for
technical support.
Made in the USA

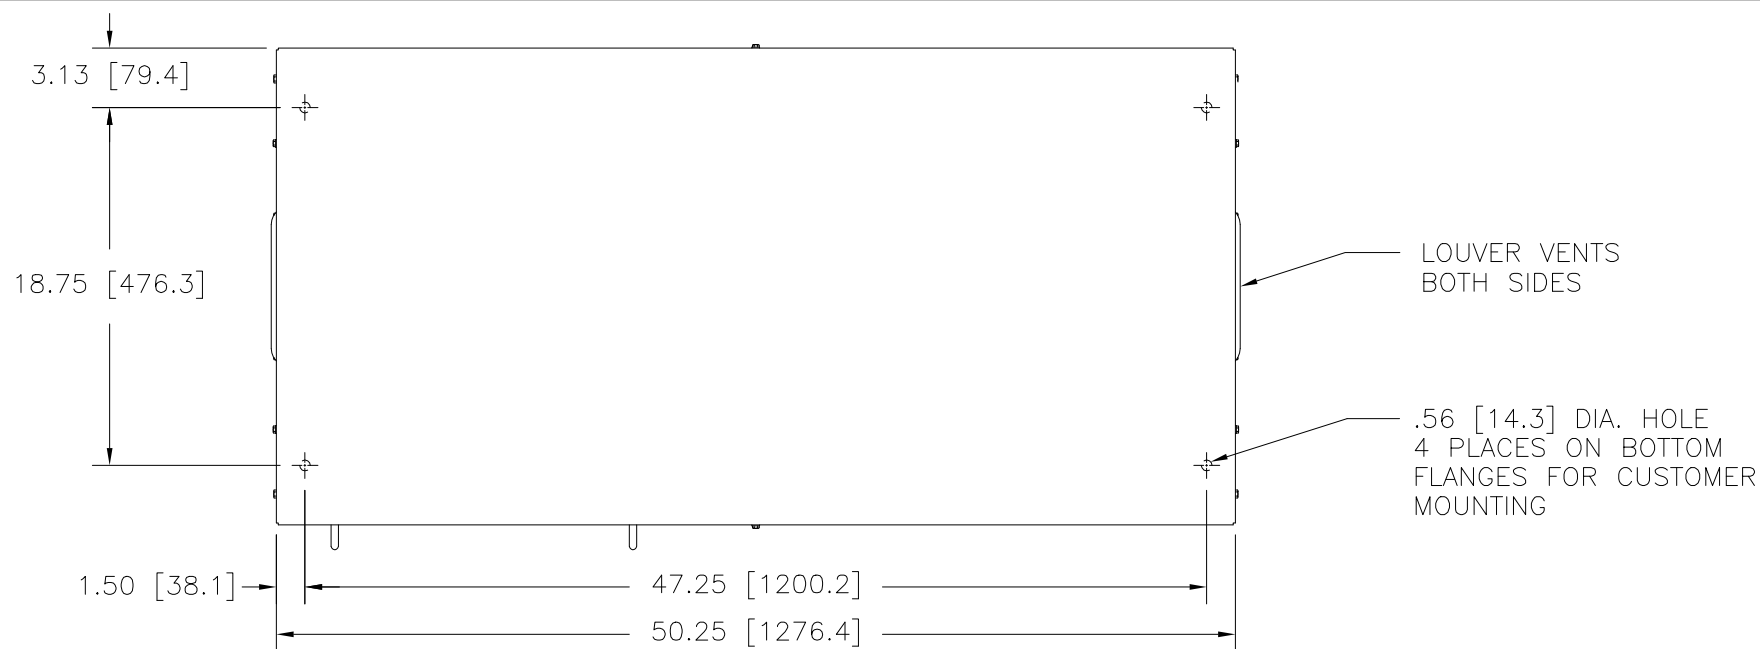

EACH PHASE OF THE REGULATOR COMPRISES A MOTOR-DRIVEN VARIABLE AUTOTRANSFORMER, A BUCK-BOOST FIXED RATIO TRANSFORMER, AND A MANUAL RAISE/LOWER SWITCH. THE MICROPROCESSOR CONTROLLER AUTOMATICALLY POSITIONS EACH OF THE AUTOTRANSFORMERS TO HOLD THE OUTPUT VOLTAGE OF EACH PHASE CONSTANT. A RS-232 INTERFACE IS PROVIDED FOR REMOTE OPERATION AND MONITORING.

SPECIFICATIONS:

WAVEFORM DISTORTION	-----	ZERO
FREQUENCY RANGE	-----	57Hz TO 63Hz
OUTPUT REGULATION	-----	±1V
CONTROL BAND (USER SELECTABLE)	-----	* ±0.5V, ±1.0V, ±2.0V, ±4.0V
CORRECTION RATE	-----	19 VOLTS/SECOND
INTERNAL IMPEDANCE	-----	LESS THAN 1%
PHASE SHIFT	-----	NEGLECTIBLE
EFFICIENCY	-----	99% TYPICAL
TEMPERATURE RANGE	-----	0°C (32°F) TO +40°C (104°F)
		* FACTORY SET AT ±0.5V

WIRE RANGES FOR CUSTOMER WIRING:


INPUT/OUTPUT/NEUTRAL TERMINALS: (1) (350MCM-#6 AWG) COMPRESSION PER PHASE
GROUND TERMINAL: (1) (1/0-#14 AWG) COMPRESSION

CONTROLS:

- MICROTERMINAL: THE TERMINAL IS PROVIDED FOR LOCAL CONTROL OF THE UNIT WITH AN LCD DISPLAY FOR OUTPUT VOLTAGE READINGS. SEE THE MP USER'S HANDBOOK (FORM #003-1622) FOR DETAILED INFORMATION.
- CONTROLLER ON/OFF SWITCH: THIS SWITCH TURNS OFF POWER TO THE MICROPROCESSOR CONTROLLER ONLY.
- MOTOR ON/OFF SWITCH: THIS SWITCH TURNS OFF POWER FROM THE MICROPROCESSOR TO EACH OF THE AUTOTRANSFORMER MOTORS.
- RAISE/LOWER SWITCHES: THESE SWITCHES ARE LOCATED INTERNALLY AND ARE ACCESSIBLE FROM THE FRONT VIA THE REMOVABLE ACCESS PANEL. THE SWITCHES ALLOW FOR EACH PHASE OF THE REGULATOR TO BE MANUALLY CONTROLLED INDIVIDUALLY.

** AT NOMINAL OUTPUT VOLTAGE INPUT VOLTAGE RANGE
SHIFTS PROPORTIONALLY WITH OUTPUT VOLTAGE SETTINGS.

THREE PHASE (INDIVIDUAL LINE CONTROL)			60 HZ
OUTPUT VOLTAGE (ADJUSTMENT)	INPUT VOLTAGE RANGE **	MAXIMUM OUTPUT AMPERES	RATED OUTPUT (KVA)
480Y/277	432-528	200	166
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS * DECIMALS .12 XX .000 XXX .005		TITLE: SPEC. CONTROL DRAWING AUTO. VOLTAGE REGULATOR TYPE: CVR-48QCIY166	
MATERIAL:		UNITS IN [mm]	
ALL DIMENSIONS APPLY AFTER PLATING		DRAWN BY: TIM RAU	
DATE: 4/29/97		FIRST USED ON:	
CHECKER:		DO NOT SCALE DWG.	
ENGINEER:		DATE:	
SCALE: .2=1		CODE IDENT. NO. 83008	
SHEET 1 OF 2		DWG. NO. 095-1930	

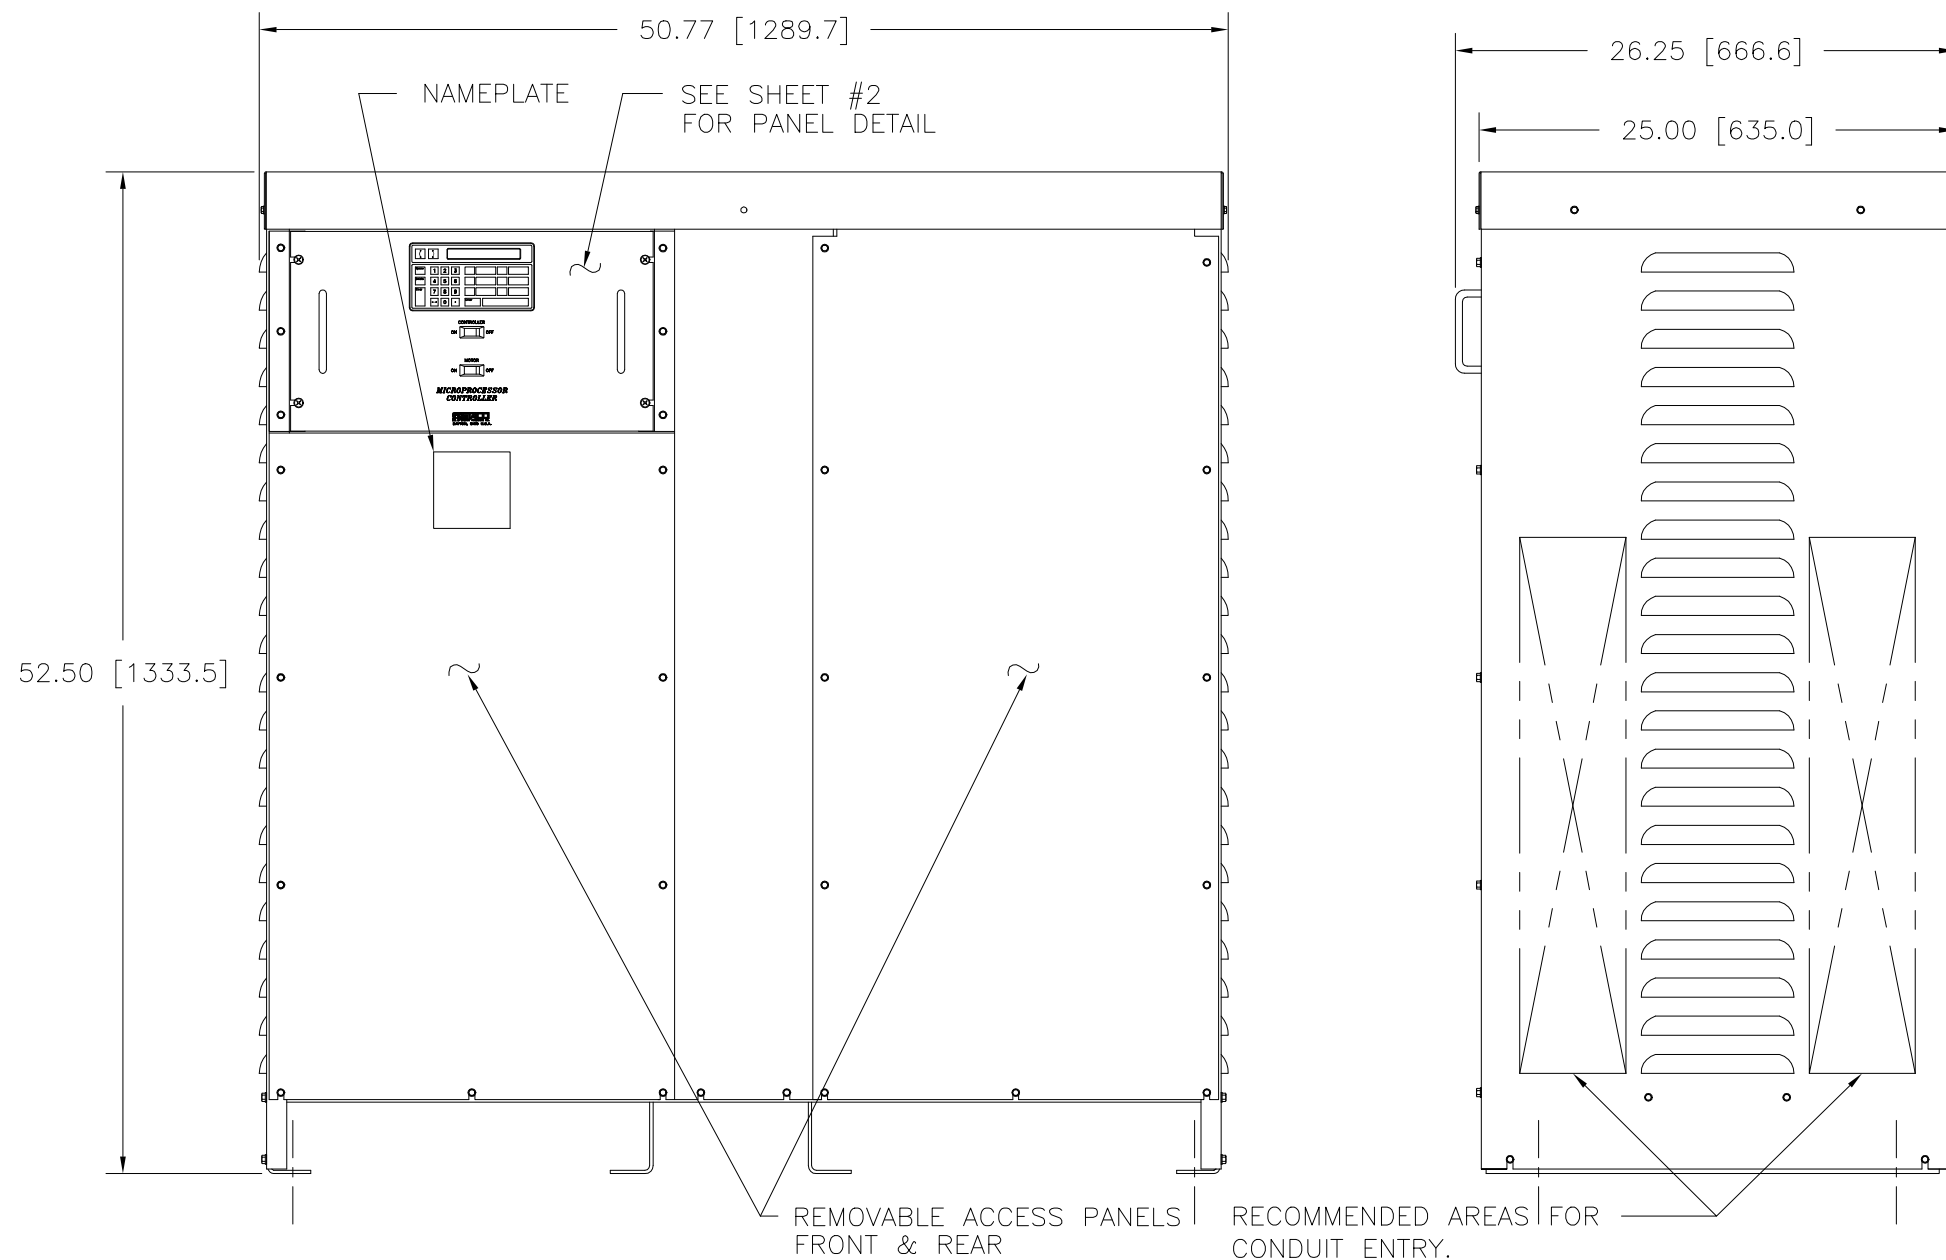

STACO
ENERGY PRODUCTS CO.
A COMPONENTS CORPORATION OF AMERICA COMPANY
DAYTON, OHIO U.S.A.