


Go to VARIAC.com
 to purchase and for
 technical support.
 Made in the USA



SPECIFICATIONS								
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM TOP	
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD			INPUT	OUTPUT
				MAX. AMPS	MAX. KVA			
THREE PHASE WYE	240	60	0-240	120	49.8	CW	4-4-4	B-B-B
			0-280	120	58.1	CW	2-2-2	B-B-B

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #				UNITS		TITLE: SPEC. CONTROL DRAWING		
DECIMALS	HOLES	ANGLES	DRAFT	IN	MM	SPEC. CONTROL DRAWING		
.XX	.125	.03	1°	1-1/2"		VARIABLE TRANSFORMER		
MATERIAL:				ALL DIMENSIONS APPLY AFTER PLATING		TYPE: 6011-6Y		
DRAWN BY		DATE	FIRST USED ON	DO NOT SCALE DWG.	CUSTOMER APPROVAL			
TIM RAU		9/22/98						
CHECKER	DATE	WEIGHT APPROX.	CODE IDENT. NO.	DWG. NO.				
		539 LBS.	83008	032-6774				
ENGINEER	DATE	SCALE	SHEET	DWG. NO.				
		.25=1	1 OF 1	032-6774				

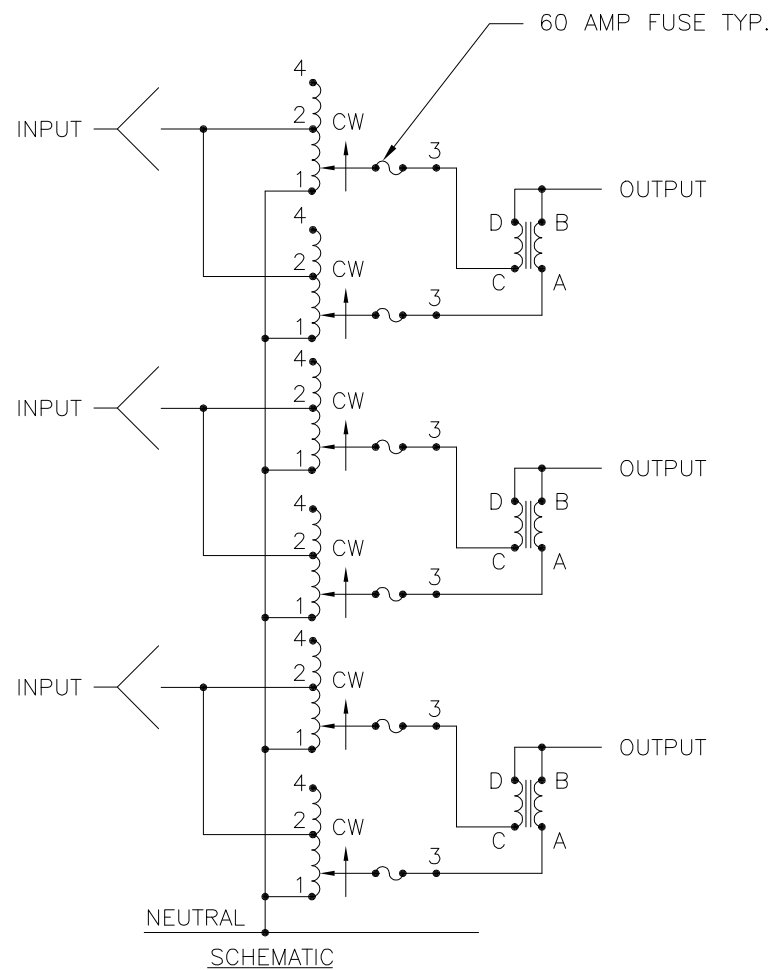